

Anritsu Advancing beyond

Signal Analyzer

MS2850A

MS2850A-047: 9 kHz to 32 GHz

MS2850A-046: 9 kHz to 44.5 GHz



Definitions.....	5
Conditions of Specifications	5
Signal Analyzer/Spectrum Analyzer.....	6
Frequency	6
Performance guarantee frequency range.....	6
Frequency bands	6
Pre-selector range	6
Internal reference oscillator	6
Single side band noise (SSB phase noise).....	7
Spurious caused by the local signal.....	7
Amplitude	7
Level measurement range	7
Maximum input level	7
Input attenuator range	8
Input attenuator switching uncertainty.....	8
Reference level.....	8
Linearity error	8
RF frequency characteristics	9
Second harmonic distortion	10
Residual responses	11
Spectrum Analyzer	12
Frequency	12
Performance guarantee frequency range.....	12
Frequency setting range.....	12
SPAN.....	12
Display frequency accuracy.....	12
Resolution bandwidth (RBW).....	12
Video bandwidth (VBW)	12
Amplitude.....	13
Display average noise level (DANL)	13
Total level accuracy	16
1 dB gain compression	16
Spurious responses.....	17
2-tone 3rd-order intermodulation distortion.....	17
Image Response	18
Sweep.....	18
Sweep mode	18
Sweep time.....	18
Waveform display.....	18
Detector	18
Trace points	18
Scale	18
Trigger function	18
Gate function	18
Measure function.....	19
Adjust channel power (ACP)	19
Burst average.....	19
Channel power.....	19
Occupied bandwidth (OBW).....	19
Spectrum emission mask (SEM)	19
Spurious emission.....	19
Frequency counter.....	19
Two-tone third-order intermodulation distortion.....	19

Signal Analyzer	20
Model/Name	20
Performance guarantee frequency range	20
Function	20
Trace mode	20
SPAN	20
Capture function	20
Trigger	20
ADC resolution	21
Spectrum displayed function	21
Analysis time length	21
Frequency	21
Resolution bandwidth (RBW)	21
Amplitude	21
In-band frequency characteristics	22
In-band phase linearity	23
Image response	23
RF frequency characteristics	23
Linearity error	23
Spurious free dynamic range due to ADC (SFDR)	23
ADC clipping level	23
IF output	24
Display average noise level (DANL)	24
Measure function	26
Power vs. Time	27
Analysis time range	27
Resolution bandwidth	27
Measure function	27
Frequency vs. Time	27
Analysis time range	27
Operating level range	27
Frequency (vertical axis)	27
Displayed frequency accuracy	27
Measure function	27
Phase vs. Time	27
Analysis time range	27
Phase (vertical axis)	27
CCDF	28
Analysis time range	28
Display	28
Resolution bandwidth	28
Spectrogram	28
Analysis time range	28
Frequency	28
Resolution bandwidth (RBW)	28
Replay function	28
Connector	29
RF input	29
External reference input	31
Reference signal output	31
Sweep status output	31
SA trigger input	31
SA trigger output	31
External controls	32
Ethernet (10/100/1000Base-T)	32
GPIB	32
USB (B)	32
USB (A)	32
Monitor output	32
AUX (for future extension)	32

IF output	32
1st local output	32
Noise source.....	33
USB (B)	34
PCIe.....	34
CAL port (for future extension)	34
Display	34
General	35
Dimensions and mass.....	35
Power supply.....	35
Temperature	35
Environment performance	35
EU Standards (CE Marking).....	35
EU Standards (UKCA Marking).....	35
OS.....	35
Options	36
Phase Noise Measurement Function MS2850A-010	36
Frequency.....	36
Secondary Storage Device MS2850A-011	36
Removable SSD, Win10 MS2850A-014.....	36
Noise Figure Measurement Function MS2850A-017	36
Frequency.....	36
NF measurement.....	36
Gain measurement	36
Resolution bandwidth	36
Analysis Bandwidth 255 MHz MS2850A-032 (Standard)	37
Analysis Bandwidth Extension 510 MHz MS2850A-033.....	37
Analysis Bandwidth Extension 1 GHz MS2850A-034.....	37
Functions	37
Frequency.....	37
Amplitude.....	37
Noise Floor Reduction MS2850A-051	38
Noise Floor Reduction.....	38
External Interface for High Speed Data Transfer PCIe MS2850A-053.....	38
External Interface for High Speed Data Transfer USB3.0 MS2850A-054	38
Microwave Preselector Bypass MS2850A-067 (Standard).....	39
Frequency.....	39
Amplitude.....	39
Microwave Preamplifier MS2850A-068	39
Frequency.....	39
Amplitude.....	39
Extended Specifications MS2850A-072.....	40
Frequency response in a certain 100 MHz range within bandwidth	40
Phase linearity in a certain 100 MHz range within bandwidth.....	40
RF input.....	40
Low Second Harmonic Distortion MS2850A-076	41
Frequency.....	41
Amplitude.....	41

Definitions

Typical (typ.)

Performance not warranted. Most products meet typical performance.

Nominal (nom.)

Values not warranted. Included to facilitate application of product.

Measured (meas.)

Performance not warranted. Data actually measured by randomly selected measuring instruments.

Conditions of Specifications

The conditions are as follows unless specified otherwise.

After 30-minute warm-up (at constant ambient temperature)

Auto Sweep Time Select: Normal

Auto Swp Type Rules: Swept Only

Switching Speed mode: Normal

Attenuator Mode: Mechanical Atten Only

After CAL operation

The conditions of Signal Analyzer mode are specified at center frequency unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in

95 percent of the cases with a 95 percent confidence at shipment, for a certain temperature in the range of 18° to 28°C.

These values do not include measurement uncertainty, are not guaranteed, and are updated occasionally if a change in the statistical values is observed.

Frequency

Performance guarantee frequency range

Spectrum Analyzer mode, Signal Analyzer mode (Bandwidth ≤ 31.25 MHz)

MS2850A-047: 9 kHz to 32 GHz

MS2850A-046: 9 kHz to 44.5 GHz

Signal Analyzer mode (Bandwidth > 31.25 MHz)

MS2850A-047: 800 MHz to 32 GHz

MS2850A-046: 800 MHz to 44.5 GHz

Frequency bands

Spectrum Analyzer mode, Signal Analyzer mode (Bandwidth ≤ 31.25 MHz)

MS2850A-047/046

Frequency Range	Band	Mixer harmonics order (N)
9 kHz to 4000 MHz	0	1
3500 MHz to 4400 MHz	1	1/2
4300 MHz to 6000 MHz	2	1
3900 MHz to 8000 MHz	3	1
7900 MHz to 10575 MHz	4	1
10475 MHz to 12200 MHz	5	2
12100 MHz to 18400 MHz	6	2
18300 MHz to 26600 MHz	7	4
26500 MHz to 42100 MHz	8	4
42000 MHz to 44500 MHz	9	8

Signal Analyzer mode (Bandwidth > 31.25 MHz)

MS2850A-047/046

Frequency Range	Band	Mixer harmonics order (N)
100 MHz to 4200 MHz	0	1
4200 MHz to 8000 MHz	2	1
8000 MHz to 10575 MHz	4	1
10575 MHz to 12200 MHz	5	2
12200 MHz to 18500 MHz	6	2
18500 MHz to 26400 MHz	7	4
26400 MHz to 42100 MHz	8	4
42100 MHz to 44500 MHz	9	8

Pre-selector range

Model	Frequency Band Mode	
	Normal	Spurious
MS2850A-047/046	> 4 GHz	≥ 3.5 GHz

Internal reference oscillator


Accuracy	$\pm [(\text{Time from the previous calibration} \times \text{Aging rate}) + \text{Temperature characteristics} + \text{The initial calibration before shipment}]$
Start-up characteristics	Based on frequency 24 hours after power-on, at 23°C $\pm 5 \times 10^{-7}$ (2 minutes after power-on) $\pm 5 \times 10^{-8}$ (5 minutes after power-on)
Aging rate	$\pm 1 \times 10^{-7}/\text{year}$
Temperature characteristics	$\pm 2 \times 10^{-8}$ (0°C to +45°C)
Frequency accuracy at the initial calibration	$\pm 2.2 \times 10^{-8}$ (18°C to 28°C, 1 hour after power-on)

Single side band noise (SSB phase noise)

At 18° to 28°C, Center frequency: 1 GHz, Spectrum Analyzer mode

Offset	Specification	95th percentile
10 Hz	-80 dBc/Hz (nom.)	—
100 Hz	-92 dBc/Hz (nom.)	—
1 kHz	-117 dBc/Hz (nom.)	—
10 kHz	-123 dBc/Hz	-127 dBc/Hz
100 kHz	-123 dBc/Hz	-126 dBc/Hz
1 MHz	-135 dBc/Hz	-136 dBc/Hz
10 MHz	-148 dBc/Hz (nom.)	—

SSB Phase Noise (meas.)

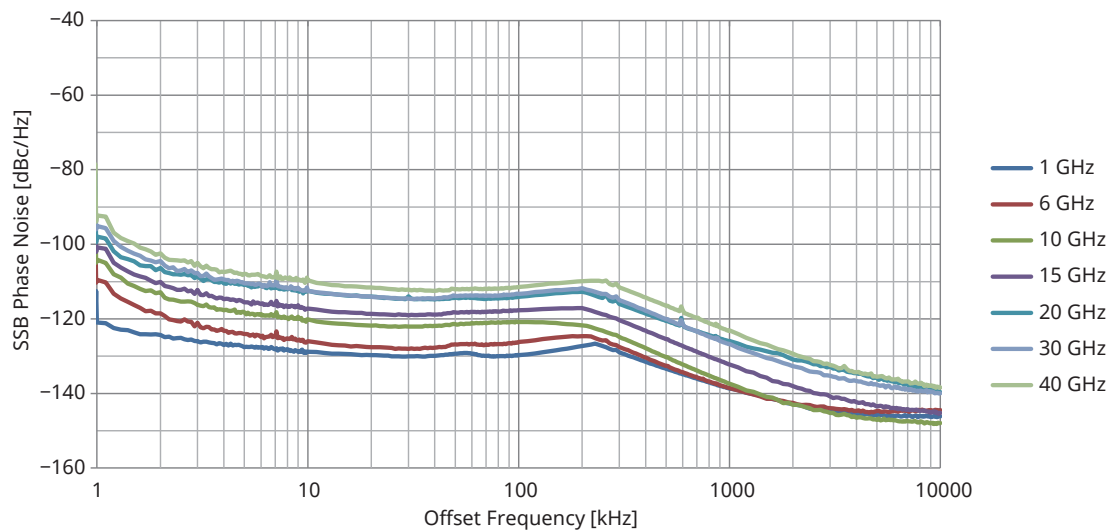

Spurious caused by the local signal

10 MHz < frequency ≤ 1 GHz

3 kHz ≤ offset frequency < 100 kHz	-70 dBc (nom.)
100 kHz ≤ offset frequency < 10 MHz	-75 dBc (nom.)

Frequency > 1 GHz

3 kHz ≤ offset frequency < 100 kHz	$-70 + 20 \times \log(f)$ dBc (nom.)
100 kHz ≤ offset frequency < 10 MHz	$-75 + 20 \times \log(N)$ dBc (nom.)

f: Receiving frequency [GHz] N: Mixing order

Amplitude

Level measurement range

Without MS2850A-068 or Preamp Off	DANL to +30 dBm
With MS2850A-068 and Preamp On	DANL to +10 dBm

Maximum input level

	Average total power	DC voltage
Without MS2850A-068 or Preamp Off	+30 dBm (Input attenuator: ≥10 dB) +20 dBm (Input attenuator: 0 dB)	±0 Vdc
With MS2850A-068 and Preamp On	+10 dBm (Input attenuator: 0 dB)	±0 Vdc

Input attenuator range

0 to 60 dB, 2 dB Steps

E-ATT Combined Mode is available on following conditions.

Spectrum Analyzer mode, Signal Analyzer mode (Bandwidth ≤ 31.25 MHz)

Frequency Band: Normal: $0 \text{ Hz} \leq \text{frequency} \leq 6 \text{ GHz}$

Frequency Band: Spurious: $0 \text{ Hz} \leq \text{frequency} \leq 4 \text{ GHz}$

Signal Analyzer mode (Bandwidth > 31.25 MHz)

$100 \text{ MHz} \leq \text{frequency} < 4.2 \text{ GHz}$

Input attenuator switching uncertainty

At 18°C to 28°C , Referenced to 10 dB, without MS2850A-068 or Preamp Off, 10 to 60 dB

Frequency Range	Spectrum Analyzer mode Signal Analyzer mode (Bandwidth ≤ 31.25 MHz)	Signal Analyzer mode (Bandwidth > 31.25 MHz)
$300 \text{ kHz} \leq \text{frequency} < 4 \text{ GHz}$, Frequency Band Mode: Normal $300 \text{ kHz} \leq \text{frequency} < 3.5 \text{ GHz}$, Frequency Band Mode: Spurious	$\pm 0.20 \text{ dB}$	$\pm 0.30 \text{ dB}$
$4 \text{ GHz} \leq \text{frequency} \leq 13.8 \text{ GHz}$, Frequency Band Mode: Normal $3.5 \text{ GHz} \leq \text{frequency} \leq 13.8 \text{ GHz}$, Frequency Band Mode: Spurious	$\pm 0.75 \text{ dB}$	
$13.8 \text{ GHz} < \text{frequency} \leq 26.5 \text{ GHz}$	$\pm 0.80 \text{ dB}$	
$26.5 \text{ GHz} < \text{frequency} \leq 40 \text{ GHz}$	$\pm 1.0 \text{ dB}$	
$40 \text{ GHz} < \text{frequency} \leq 44.5 \text{ GHz}$	$\pm 1.0 \text{ dB (typ.)}$	

Reference level

Setting range

Log scale: -120 to $+50 \text{ dBm}$, or Equivalent level

Linear scale: $22.4 \mu\text{V}$ to 70.7 V , or Equivalent level

Setting resolution: 0.01 dB , or Equivalent level

Scale units

Log scale: dBm , $\text{dB}\mu\text{V}$, dBmV , $\text{dB}\mu\text{V (emf)}$, $\text{dB}\mu\text{V/m}$, V , W

Linear scale: V

Linearity error

Spectrum Analyzer mode, Signal Analyzer mode, without MS2850A-051/151 or Noise Floor Reduction: Off (Bandwidth ≤ 31.25 MHz), Excluding the noise floor effect

Without MS2850A-068 or Preamp Off	Mixer input level: $\leq -20 \text{ dBm}$	$\pm 0.07 \text{ dB}$
	Mixer input level: $\leq -10 \text{ dBm}$	$\pm 0.10 \text{ dB}$
With MS2850A-068 and Preamp On	Preamplifier input level: $\leq -40 \text{ dBm}$	$\pm 0.07 \text{ dB}$
	Preamplifier input level: $\leq -30 \text{ dBm}$	$\pm 0.10 \text{ dB}$
Attenuator Mode: E-ATT Combined, Without MS2850A-068 or Preamp Off	Mixer input level: $\leq -20 \text{ dBm}$, RF input level: $\leq -10 \text{ dBm}$	$\pm 0.07 \text{ dB}$
	Mixer input level: $\leq -10 \text{ dBm}$, RF input level: $\leq -10 \text{ dBm}$	$\pm 0.10 \text{ dB}$
	Mixer input level: $\leq -20 \text{ dBm}$, $9 \text{ kHz} \leq \text{frequency} \leq 300 \text{ MHz}$, RF input level: $\leq +5 \text{ dBm}$	$\pm 0.07 \text{ dB (nom.)}$
	Mixer input level: $\leq -20 \text{ dBm}$, $300 \text{ MHz} < \text{frequency} \leq 6 \text{ GHz}$, RF input level: $\leq +20 \text{ dBm}$	
	Mixer input level: $\leq -10 \text{ dBm}$, $9 \text{ kHz} \leq \text{frequency} \leq 300 \text{ MHz}$, RF input level: $\leq +5 \text{ dBm}$	$\pm 0.10 \text{ dB (nom.)}$
	Mixer input level: $\leq -10 \text{ dBm}$, $300 \text{ MHz} < \text{frequency} \leq 6 \text{ GHz}$, RF input level: $\leq +20 \text{ dBm}$	

Signal Analyzer mode (Bandwidth > 31.25 MHz), Excluding the noise floor effect

Without MS2850A-068 or Preamp Off	Mixer input level: $\leq -10 \text{ dBm}$	$\pm 0.20 \text{ dB (typ.)}$
With MS2850A-068 and Preamp On	Preamplifier input level: $\leq -30 \text{ dBm}$	$\pm 0.20 \text{ dB (typ.)}$

RF frequency characteristics

Microwave Preselector Bypass: Off

	Without MS2850A-068 or Preamp Off 18°C to 28°C, Input attenuator: 10 dB, Preselector Auto Tune is done	
	Spectrum Analyzer mode Signal Analyzer mode (Bandwidth ≤31.25 MHz)	Signal Analyzer mode (Bandwidth >31.25 MHz)
9 kHz ≤ frequency < 300 kHz	±1.00 dB	—
300 kHz ≤ frequency < 50 MHz	±0.35 dB	—
50 MHz ≤ frequency < 4 GHz, Frequency Band Mode: Normal	±0.35 dB	±0.45 dB
50 MHz ≤ frequency < 3.5 GHz, Frequency Band Mode: Spurious		
4 GHz ≤ frequency ≤6 GHz, Frequency Band Mode: Normal	±1.50 dB	
3.5 GHz ≤ frequency ≤ 4 GHz, Frequency Band Mode: Spurious		
6 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Normal	±1.50 dB	
4 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Spurious		
13.8 GHz < frequency ≤ 26.5 GHz	±2.50 dB	
26.5 GHz < frequency ≤ 40 GHz	±2.50 dB	
40 GHz < frequency ≤ 44.5 GHz	±2.50 dB (typ.)	

Microwave Preselector Bypass: Off

	With MS2850A-068 and Preamp On, 18°C to 28°C, Input attenuator: 10 dB, Preselector Auto Tune is done	
	Spectrum Analyzer mode Signal Analyzer mode (Bandwidth ≤31.25 MHz)	Signal Analyzer mode (Bandwidth >31.25 MHz)
100 kHz ≤ frequency < 300 kHz	±1.00 dB	—
300 kHz ≤ frequency < 4 GHz, Frequency Band Mode: Normal	±0.65 dB	±0.75 dB
300 kHz ≤ frequency < 3.5 GHz, Frequency Band Mode: Spurious		
4 GHz ≤ frequency ≤ 13.8 GHz, Frequency Band Mode: Normal	±1.80 dB	
3.5 GHz ≤ frequency ≤ 13.8 GHz, Frequency Band Mode: Spurious		
13.8 GHz < frequency ≤ 26.5 GHz	±2.50 dB	
26.5 GHz < frequency ≤ 40 GHz	±3.50 dB	
40 GHz < frequency ≤ 44.5 GHz	±3.50 dB (nom.)	

Microwave Preselector Bypass: On

	Without MS2850A-068 or Preamp Off, 18°C to 28°C, Input attenuator: 10 dB	
	Spectrum Analyzer mode Signal Analyzer mode	
6 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Normal	±1.0 dB	
4 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Spurious		
4 GHz ≤ frequency ≤ 13.8 GHz, Signal Analyzer mode (Bandwidth >31.25 MHz)		
13.8 GHz < frequency ≤ 26.5 GHz	±1.5 dB	
26.5 GHz < frequency ≤ 40 GHz	±2.0 dB	
40 GHz < frequency ≤ 44.5 GHz	±2.0 dB (typ.)	

Microwave Preselector Bypass: On

	With MS2850A-068 and Preamp On, 18°C to 28°C, Input attenuator: 10 dB
	Spectrum Analyzer mode Signal Analyzer mode
6 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Normal	±1.8 dB
4 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Spurious	
4 GHz ≤ frequency ≤ 13.8 GHz, Signal Analyzer mode (Bandwidth > 31.25 MHz)	
13.8 GHz < frequency ≤ 26.5 GHz	±2.5 dB
26.5 GHz < frequency ≤ 40 GHz	±3.0 dB
40 GHz < frequency ≤ 44.5 GHz	±3.0 dB (nom.)

Second harmonic distortion

Without MS2850A-076,
Without MS2850A-068 or Preamp Off,
Microwave Preselector Bypass: Off,
Spectrum Analyzer mode or Signal Analyzer mode (Bandwidth ≤ 31.25 MHz)

At mixer input level: –30 dBm

Frequency Range	Harmonics	SHI
10 MHz ≤ Input frequency ≤ 300 MHz	≤ –60 dBc	≥ +30 dBm
300 MHz < Input frequency ≤ 1 GHz	≤ –65 dBc	≥ +35 dBm
1 GHz < Input frequency ≤ 2 GHz, Frequency Band Mode: Normal	≤ –65 dBc	≥ +35 dBm
1 GHz < Input frequency < 1.75 GHz, Frequency Band Mode: Spurious	≤ –65 dBc	≥ +35 dBm

At mixer input level: –20 dBm

Frequency Range	Harmonics	SHI
2 GHz < Input frequency ≤ 3 GHz, Frequency Band Mode: Normal	≤ –80 dBc	≥ +60 dBm
1.75 GHz ≤ Input frequency ≤ 2 GHz, Frequency Band Mode: Spurious	≤ –80 dBc	≥ +60 dBm

At mixer input level: –10 dBm

Frequency Range	Harmonics	SHI
2 GHz < Input frequency ≤ 3 GHz, Frequency Band Mode: Spurious	≤ –70 dBc	≥ +60 dBm
3 GHz < Input frequency ≤ 13.25 GHz	≤ –70 dBc	≥ +60 dBm
13.25 GHz < Input frequency ≤ 22.25 GHz	≤ –70 dBc (nom.)	≥ +60 dBm (nom.)

With MS2850A-076, Without MS2850A-068 or Preamp Off,
Microwave Preselector Bypass: Off,
Spectrum Analyzer mode or Signal Analyzer mode (Bandwidth ≤ 31.25 MHz)

At mixer input level: –30 dBm

Frequency Range	Harmonics	SHI
10 MHz ≤ Input frequency ≤ 300 MHz	≤ –60 dBc	≥ +30 dBm
300 MHz < Input frequency ≤ 1 GHz	≤ –65 dBc	≥ +35 dBm
1 GHz < Input frequency ≤ 2 GHz, Frequency Band Mode: Normal	≤ –65 dBc	≥ +35 dBm
1 GHz < Input frequency < 1.75 GHz, Frequency Band Mode: Spurious	≤ –65 dBc	≥ +35 dBm

At mixer input level: –20 dBm

Frequency Range	Harmonics	SHI
2 GHz < Input frequency ≤ 3 GHz, Frequency Band Mode: Normal	≤ –80 dBc	≥ +60 dBm
1.75 GHz ≤ Input frequency ≤ 2 GHz, Frequency Band Mode: Spurious	≤ –80 dBc	≥ +60 dBm

At mixer input level: –10 dBm

Frequency Range	Harmonics	SHI
2 GHz < Input frequency ≤ 3 GHz, Frequency Band Mode: Spurious	≤ –80 dBc	≥ +70 dBm
3 GHz < Input frequency ≤ 13.25 GHz	≤ –90 dBc	≥ +80 dBm
13.25 GHz < Input frequency ≤ 22.25 GHz	≤ –90 dBc (nom.)	≥ +80 dBm (nom.)

With MS2850A-068 and Preamp On,
Microwave Preselector Bypass: Off

At preamplifier input level: –45 dBm

Frequency Range	Harmonics	SHI
10 MHz ≤ Input frequency ≤ 300 MHz	≤ –50 dBc (nom.)	≥ +5 dBm (nom.)
300 MHz < Input frequency ≤ 2 GHz	≤ –55 dBc (nom.)	≥ +10 dBm (nom.)
2 GHz < Input frequency ≤ 13.25 GHz	≤ –45 dBc (nom.)	≥ 0 dBm (nom.)
13.25 GHz < Input frequency ≤ 22.25 GHz	≤ –40 dBc (nom.)	≥ –5 dBm (nom.)

Attenuator Mode : E-ATT Combined
Without MS2850A-068 or Preamp Off

At mixer input level: –30 dBm

Frequency Range	RF input level	Harmonics	SHI
10 MHz ≤ Input frequency ≤ 300 MHz	≤ –5 dBm	≤ –60 dBc	≥ +30 dBm
300 MHz < Input frequency ≤ 1 GHz	≤ –5 dBm	≤ –65 dBc	≥ +35 dBm
1 GHz < Input frequency ≤ 2 GHz, Frequency Band Mode: Normal 1 GHz < Input frequency < 1.75 GHz, Frequency Band Mode: Spurious	≤ +5 dBm	≤ –65 dBc	≥ +35 dBm

At mixer input level: –20 dBm

Frequency Range	RF input level	Harmonics	SHI
2 GHz < Input frequency ≤ 3 GHz, Frequency Band Mode: Normal 1.75 GHz ≤ Input frequency ≤ 3 GHz, Frequency Band Mode: Spurious	≤ +5 dBm	≤ –80 dBc	≥ +60 dBm

At mixer input level: –30 dBm

Frequency Range	RF input level	Harmonics	SHI
10 MHz ≤ Input frequency ≤ 300 MHz	≤ 0 dBm	≤ –60 dBc (nom.)	≥ +30 dBm (nom.)
300 MHz < Input frequency ≤ 1 GHz	≤ +15 dBm	≤ –65 dBc (nom.)	≥ +35 dBm (nom.)
1 GHz < Input frequency ≤ 2 GHz, Frequency Band Mode: Normal 1 GHz < Input frequency < 1.75 GHz, Frequency Band Mode: Spurious	≤ +15 dBm	≤ –65 dBc (nom.)	≥ +35 dBm (nom.)

At mixer input level: –20 dBm

Frequency Range	RF input level	Harmonics	SHI
2 GHz < Input frequency ≤ 3 GHz, Frequency Band Mode: Normal 1.75 GHz ≤ Input frequency ≤ 2 GHz, Frequency Band Mode: Spurious	–5 dBm < RF input level ≤ +15 dBm	≤ –80 dBc (nom.)	≥ +60 dBm (nom.)

Residual responses

Frequency ≥ 1 MHz, Input attenuator 0 dB, 50Ω terminated,
Spectrum Analyzer mode or Signal Analyzer mode (Bandwidth ≤ 31.25 MHz)

1 MHz ≤ frequency ≤ 1 GHz	≤ –100 dBm
1 GHz < frequency ≤ 6 GHz	≤ –90 dBm (typ.)
6 GHz < frequency ≤ 13.6 GHz	≤ –90 dBm (nom.)
13.6 GHz < frequency ≤ 26.5 GHz	≤ –90 dBm (nom.)
26.5 GHz < frequency ≤ 44.5 GHz	≤ –80 dBm (nom.)

Frequency

Performance guarantee frequency range

Model	Frequency Range
MS2850A-047	9 kHz to 32 GHz
MS2850A-046	9 kHz to 44.5 GHz

Frequency setting range

Model	Setting Range	Setting resolution
MS2850A-047	–100 MHz to 32.5 GHz	1 Hz
MS2850A-046	–100 MHz to 45 GHz	1 Hz

SPAN

Model	Setting Range	Setting resolution
MS2850A-047	0 Hz, 300 Hz to 32 GHz	2 Hz
MS2850A-046	0 Hz, 300 Hz to 44.5 GHz	2 Hz

SPAN accuracy: $\pm 0.2\%$ (Trace Point 10,001)

Display frequency accuracy

$\pm (\text{Display frequency} \times \text{Frequency reference accuracy} + \text{SPAN frequency} \times \text{SPAN accuracy} + \text{RBW} \times 0.05 + 2 \times N + \text{SPAN frequency}/(\text{Trace points} - 1)) \text{ Hz}$

N: Mixer harmonic order

Resolution bandwidth (RBW)

Setting range	1 Hz to 3 MHz (1-3 sequence), 500 Hz, 50 kHz, 2 MHz, 5 MHz, 10 MHz 1 Hz to 10 Hz: Can not be set when SPAN 0 Hz
Selectivity	(–60 dB/–3 dB) 4.5: 1 (1 Hz to 10 MHz, nom.)

Video bandwidth (VBW)

Setting range	1 Hz to 3 kHz (1-3 sequence), 5 kHz, 10 kHz to 10 MHz (1-3 sequence), Off
Selectivity	(–60 dB/–3 dB) 4.5: 1 (1 Hz to 10 MHz, nom.)
VBW Mode	Video Average/Power Average

Display average noise level (DANL)

At 18°C to 28°C, Detector: Sample, VBW: 1 Hz (Video Average), Input attenuator: 0 dB

Without MS2850A-068, Without MS2850A-076,
Microwave Preselector Bypass: On/Off Common,
Frequency Band Mode: Normal
or

Without MS2850A-068, With MS2850A-076,
Microwave Preselector Bypass: On,
Frequency Band Mode: Normal

Frequency Range	DANL
9 kHz ≤ frequency < 100 kHz	–120 dBm/Hz
100 kHz ≤ frequency < 1 MHz	–134 dBm/Hz
1 MHz ≤ frequency < 10 MHz	–144 dBm/Hz
10 MHz ≤ frequency < 30 MHz	–150 dBm/Hz
30 MHz ≤ frequency < 1 GHz	–153 dBm/Hz
1 GHz ≤ frequency < 2.4 GHz	–150 dBm/Hz
2.4 GHz ≤ frequency ≤ 3.5 GHz	–147 dBm/Hz
3.5 GHz < frequency ≤ 4 GHz	–144 dBm/Hz
4 GHz < frequency ≤ 6 GHz	–144 dBm/Hz
6 GHz < frequency ≤ 13 GHz	–146 dBm/Hz
13 GHz < frequency ≤ 18.3 GHz	–144 dBm/Hz
18.3 GHz < frequency ≤ 26.5 GHz	–140 dBm/Hz
26.5 GHz < frequency ≤ 34 GHz	–140 dBm/Hz
34 GHz < frequency ≤ 40 GHz	–136 dBm/Hz
40 GHz < frequency ≤ 44.5 GHz	–130 dBm/Hz (nom.)

With MS2850A-068 and Preamp: Off, Without MS2850A-076,
Microwave Preselector Bypass: On/Off Common,
Frequency Band Mode: Normal

Frequency Range	DANL	95th percentile
9 kHz ≤ frequency < 100 kHz	–120 dBm/Hz	–137 dBm/Hz
100 kHz ≤ frequency < 1 MHz	–134 dBm/Hz	–143 dBm/Hz
1 MHz ≤ frequency < 10 MHz	–144 dBm/Hz	–148 dBm/Hz
10 MHz ≤ frequency < 30 MHz	–150 dBm/Hz	–152 dBm/Hz
30 MHz ≤ frequency < 1 GHz	–153 dBm/Hz	–153 dBm/Hz
1 GHz ≤ frequency < 2.4 GHz	–150 dBm/Hz	–152 dBm/Hz
2.4 GHz ≤ frequency ≤ 3.5 GHz	–147 dBm/Hz	–148 dBm/Hz
3.5 GHz < frequency ≤ 4 GHz	–144 dBm/Hz	–148 dBm/Hz
4 GHz < frequency ≤ 6 GHz	–144 dBm/Hz	–148 dBm/Hz
6 GHz < frequency ≤ 13 GHz	–142 dBm/Hz	–145 dBm/Hz
13 GHz < frequency ≤ 18.3 GHz	–140 dBm/Hz	–141 dBm/Hz
18.3 GHz < frequency ≤ 26.5 GHz	–136 dBm/Hz	–137 dBm/Hz
26.5 GHz < frequency ≤ 34 GHz	–135 dBm/Hz	–139 dBm/Hz
34 GHz < frequency ≤ 40 GHz	–131 dBm/Hz	–134 dBm/Hz
40 GHz < frequency ≤ 44.5 GHz	–125 dBm/Hz (nom.)	—

With MS2850A-068 and Preamp: Off, With MS2850A-076
Microwave Preselector Bypass: On,
Frequency Band Mode: Normal

Frequency Range	DANL
9 kHz $\leq$ frequency < 100 kHz	-120 dBm/Hz
100 kHz $\leq$ frequency < 1 MHz	-134 dBm/Hz
1 MHz $\leq$ frequency < 10 MHz	-144 dBm/Hz
10 MHz $\leq$ frequency < 30 MHz	-150 dBm/Hz
30 MHz $\leq$ frequency < 1 GHz	-153 dBm/Hz
1 GHz $\leq$ frequency < 2.4 GHz	-150 dBm/Hz
2.4 GHz $\leq$ frequency $\leq$ 3.5 GHz	-147 dBm/Hz
3.5 GHz < frequency $\leq$ 4 GHz	-144 dBm/Hz
4 GHz < frequency $\leq$ 6 GHz	-144 dBm/Hz
6 GHz < frequency $\leq$ 13 GHz	-142 dBm/Hz
13 GHz < frequency $\leq$ 18.3 GHz	-140 dBm/Hz
18.3 GHz < frequency $\leq$ 26.5 GHz	-136 dBm/Hz
26.5 GHz < frequency $\leq$ 34 GHz	-135 dBm/Hz
34 GHz < frequency $\leq$ 40 GHz	-131 dBm/Hz
40 GHz < frequency $\leq$ 44.5 GHz	-125 dBm/Hz (nom.)

With MS2850A-068 and Preamp: On, Without MS2850A-076,
Microwave Preselector Bypass: On,
Frequency Band Mode: Normal

Frequency Range	DANL	95th percentile
100 kHz	-147 dBm/Hz (nom.)	—
1 MHz	-156 dBm/Hz	-163 dBm/Hz
30 MHz $\leq$ frequency < 1 GHz	-166 dBm/Hz	-168 dBm/Hz
1 GHz $\leq$ frequency < 2 GHz	-164 dBm/Hz	-167 dBm/Hz
2 GHz $\leq$ frequency $\leq$ 3.5 GHz	-163 dBm/Hz	-165 dBm/Hz
3.5 GHz < frequency $\leq$ 4 GHz	-160 dBm/Hz	-164 dBm/Hz
4 GHz < frequency $\leq$ 6 GHz	-160 dBm/Hz	-162 dBm/Hz
6 GHz < frequency $\leq$ 13 GHz	-160 dBm/Hz	-162 dBm/Hz
13 GHz < frequency $\leq$ 18.3 GHz	-159 dBm/Hz	-161 dBm/Hz
18.3 GHz < frequency $\leq$ 26.5 GHz	-155 dBm/Hz	-157 dBm/Hz
26.5 GHz < frequency $\leq$ 34 GHz	-152 dBm/Hz	-156 dBm/Hz
34 GHz < frequency $\leq$ 40 GHz	-149 dBm/Hz	-151 dBm/Hz
40 GHz < frequency $\leq$ 44.5 GHz	-142 dBm/Hz (nom.)	—

With MS2850A-068 and Preamp: On, With MS2850A-076,
Microwave Preselector Bypass: On,
Frequency Band Mode: Normal

Frequency Range	DANL
100 kHz	-147 dBm/Hz (nom.)
1 MHz	-156 dBm/Hz
30 MHz $\leq$ frequency < 1 GHz	-166 dBm/Hz
1 GHz $\leq$ frequency < 2 GHz	-164 dBm/Hz
2 GHz $\leq$ frequency $\leq$ 3.5 GHz	-163 dBm/Hz
3.5 GHz < frequency $\leq$ 4 GHz	-160 dBm/Hz
4 GHz < frequency $\leq$ 6 GHz	-160 dBm/Hz
6 GHz < frequency $\leq$ 13 GHz	-160 dBm/Hz
13 GHz < frequency $\leq$ 18.3 GHz	-159 dBm/Hz
18.3 GHz < frequency $\leq$ 26.5 GHz	-155 dBm/Hz
26.5 GHz < frequency $\leq$ 34 GHz	-152 dBm/Hz
34 GHz < frequency $\leq$ 40 GHz	-149 dBm/Hz
40 GHz < frequency $\leq$ 44.5 GHz	-142 dBm/Hz (nom.)

With MS2850A-068 and Preamp: On, Without MS2850A-076,
Microwave Preselector Bypass: Off,
Frequency Band Mode: Normal

Frequency Range	DANL	95th percentile
100 kHz	-147 dBm/Hz (nom.)	—
1 MHz	-156 dBm/Hz	-163 dBm/Hz
30 MHz ≤ frequency < 1 GHz	-166 dBm/Hz	-168 dBm/Hz
1 GHz ≤ frequency < 2 GHz	-164 dBm/Hz	-166 dBm/Hz
2 GHz ≤ frequency ≤ 3.5 GHz	-163 dBm/Hz	-165 dBm/Hz
3.5 GHz < frequency ≤ 4 GHz	-160 dBm/Hz	-164 dBm/Hz
4 GHz < frequency ≤ 6 GHz	-160 dBm/Hz	-162 dBm/Hz
6 GHz < frequency ≤ 13 GHz	-163 dBm/Hz	-165 dBm/Hz
13 GHz < frequency ≤ 18.3 GHz	-162 dBm/Hz	-164 dBm/Hz
18.3 GHz < frequency ≤ 26.5 GHz	-159 dBm/Hz	-161 dBm/Hz
26.5 GHz < frequency ≤ 34 GHz	-156 dBm/Hz	-159 dBm/Hz
34 GHz < frequency ≤ 40 GHz	-153 dBm/Hz	-156 dBm/Hz
40 GHz < frequency ≤ 44.5 GHz	-145 dBm/Hz (nom.)	—

With MS2850A-068 and Preamp: On, With MS2850A-076,
Microwave Preselector Bypass: Off,
Frequency Band Mode: Normal

Frequency Range	DANL
100 kHz	-147 dBm/Hz (nom.)
1 MHz	-156 dBm/Hz
30 MHz ≤ frequency < 1 GHz	-166 dBm/Hz
1 GHz ≤ frequency < 2 GHz	-164 dBm/Hz
2 GHz ≤ frequency ≤ 3.5 GHz	-163 dBm/Hz
3.5 GHz < frequency ≤ 4 GHz	-160 dBm/Hz
4 GHz < frequency ≤ 6 GHz	-160 dBm/Hz
6 GHz < frequency ≤ 13 GHz	-163 dBm/Hz
13 GHz < frequency ≤ 18.3 GHz	-162 dBm/Hz
18.3 GHz < frequency ≤ 26.5 GHz	-159 dBm/Hz
26.5 GHz < frequency ≤ 34 GHz	-156 dBm/Hz
34 GHz < frequency ≤ 40 GHz	-153 dBm/Hz
40 GHz < frequency ≤ 44.5 GHz	-145 dBm/Hz (nom.)

Without MS2850A-068 or With MS2850A-068 and Preamp: Off,
With MS2850A-076,
Microwave Preselector Bypass: Off,
Frequency Band Mode: Normal

Frequency Range	DANL
9 kHz ≤ frequency < 100 kHz	-120 dBm/Hz
100 kHz ≤ frequency < 1 MHz	-134 dBm/Hz
1 MHz ≤ frequency < 10 MHz	-144 dBm/Hz
10 MHz ≤ frequency < 30 MHz	-150 dBm/Hz
30 MHz ≤ frequency < 1 GHz	-153 dBm/Hz
1 GHz ≤ frequency < 2.4 GHz	-150 dBm/Hz
2.4 GHz ≤ frequency ≤ 3.5 GHz	-147 dBm/Hz
3.5 GHz < frequency ≤ 4 GHz	-144 dBm/Hz
4 GHz < frequency ≤ 6 GHz	-144 dBm/Hz
6 GHz < frequency ≤ 13 GHz	-147 dBm/Hz
13 GHz < frequency ≤ 18.3 GHz	-145 dBm/Hz
18.3 GHz < frequency ≤ 26.5 GHz	-141 dBm/Hz
26.5 GHz < frequency ≤ 34 GHz	-141 dBm/Hz
34 GHz < frequency ≤ 40 GHz	-139 dBm/Hz
40 GHz < frequency ≤ 44.5 GHz	-134 dBm/Hz (nom.)

Total level accuracy

At 18°C to 28°C, without MS2850A-051/151 or Noise Floor Reduction: Off, Auto Sweep Time Select: Normal, 30 Hz ≤ RBW ≤ 1 MHz,

Detection: Positive, CW, Excluding the noise floor effect and FFT runtime,

Preamp Off: Input Attenuator ≥ 10 dB, Mixer input level ≤ -10 dBm,

Preamp On: Input Attenuator = 10 dB, Preamplifier input level ≤ -30 dBm

The total level accuracy is calculated from an RSS (root summed square) error of the RF frequency characteristics, linearity error and input attenuator switching error.

Frequency Range	Frequency Band Mode	Microwave Preselector Bypass: Off		
		Without MS2850A-068 or With MS2850A-068 and Preamp: Off		With MS2850A-068 and Preamp: On
		Specification	95th percentile	Specification
300 kHz ≤ frequency < 100 MHz	—	±0.5 dB	—	±1.0 dB
100 MHz ≤ frequency < 3.5 GHz	—	±0.5 dB	±0.24 dB	±1.0 dB
3.5 GHz ≤ frequency < 4 GHz	Normal	±0.5 dB	±0.24 dB	±1.0 dB
	Spurious	±1.8 dB	±0.25 dB	±1.8 dB
4 GHz ≤ frequency ≤ 6 GHz	Normal	±1.8 dB	±0.35 dB	±1.8 dB
	Spurious		±0.53 dB	±2.0 dB
6 GHz < frequency ≤ 13.8 GHz	Normal	±1.8 dB	±0.31 dB	±2.0 dB
	Spurious		±0.53 dB	
13.8 GHz < frequency ≤ 26.5 GHz	—	±3.0 dB	±0.45 dB	±3.0 dB
26.5 GHz < frequency ≤ 40 GHz	—	±3.0 dB	±0.94 dB	±4.0 dB
40 GHz < frequency ≤ 44.5 GHz	—	±3.5 dB (nom.)	—	±4.0 dB (nom.)

Frequency Range	Microwave Preselector Bypass: On	
	Without MS2850A-068 or With MS2850A-068 and Preamp: Off	With MS2850A-068 and Preamp: On
6 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Normal	±1.4 dB	±1.9 dB
4 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Spurious		
13.8 GHz < frequency ≤ 26.5 GHz	±2.0 dB	±2.7 dB
26.5 GHz < frequency ≤ 40 GHz	±2.5 dB	±3.7 dB
40 GHz < frequency ≤ 44.5 GHz	±2.5 dB (nom.)	±3.7 dB (nom.)

1 dB gain compression

Without MS2850A-068 or Preamp Off, Without MS2850A-076

At mixer input level

Frequency Range	Frequency Band Mode	Two-tone third-order intermodulation distortion	
		Specification	95th percentile
300 MHz ≤ frequency < 3.5 GHz	—	≥ +3 dBm	≥ +5 dBm
3.5 GHz ≤ frequency ≤ 4 GHz	Normal	≥ +3 dBm	≥ +5 dBm
	Spurious		≥ +8 dBm
4 GHz < frequency ≤ 13.5 GHz	—	≥ 0 dBm	≥ +8 dBm
13.5 GHz < frequency ≤ 26.5 GHz	—	≥ -1 dBm	≥ +10 dBm
26.5 GHz < frequency ≤ 40 GHz	—	≥ -1 dBm (nom.)	—

Without MS2850A-068 or Preamp Off, With MS2850A-076

At mixer input level

300 MHz ≤ frequency ≤ 4 GHz Frequency Band Mode: Normal	≥ +3 dBm
300 MHz ≤ frequency < 3.5 GHz Frequency Band Mode: Spurious	
3.5 GHz ≤ frequency ≤ 4 GHz Frequency Band Mode: Spurious	≥ +3 dBm
4 GHz < frequency ≤ 13.5 GHz	≥ 0 dBm
13.5 GHz < frequency ≤ 26.5 GHz	≥ -1 dBm
26.5 GHz < frequency ≤ 40 GHz	≥ -1 dBm (nom.)

With MS2850A-068 and Preamp On,

At preamp input level

300 MHz ≤ frequency ≤ 4 GHz	≥ -15 dBm (nom.)
4 GHz < frequency ≤ 13.5 GHz	≥ -21 dBm (nom.)
13.5 GHz < frequency ≤ 26.5 GHz	≥ -21 dBm (nom.)
26.5 GHz < frequency ≤ 40 GHz	≥ -21 dBm (nom.)

Spurious responses

2-tone 3rd-order intermodulation distortion

Without MS2850A-068 or Preamp Off, Without MS2850A-076

At 18°C to 28°C, with mixer input level: -15 dBm (per wave) and using ≥ 300 kHz separation, at RBW ≤ 30 kHz

Frequency Range	Frequency Band Mode	Two-tone third-order intermodulation distortion		TOI	
		Specification	95th percentile	Specification	95th percentile
30 MHz $\leq$ frequency < 300 MHz	—	≤ -54 dBc	≤ -65 dBc	+12 dBm	+17 dBm
300 MHz $\leq$ frequency < 3.5 GHz	—	≤ -62 dBc	≤ -63 dBc	+16 dBm	+16.5 dBm
3.5 GHz $\leq$ frequency < 4 GHz	Normal	≤ -62 dBc	≤ -63 dBc	+16 dBm	+16.5 dBm
	Spurious	≤ -56 dBc	—	+13 dBm	—
4 GHz $\leq$ frequency $\leq$ 6 GHz	Normal	≤ -60 dBc	≤ -65 dBc	+15 dBm	+17 dBm
	Spurious	≤ -56 dBc	—	+13 dBm	—
6 GHz < frequency $\leq$ 13.5 GHz	—	≤ -56 dBc	≤ -65 dBc	+13 dBm	+17 dBm
13.5 GHz < frequency $\leq$ 26.5 GHz	—	≤ -56 dBc	≤ -68 dBc	+13 dBm	+19 dBm
26.5 GHz < frequency $\leq$ 40 GHz	—	≤ -56 dBc (nom.)	—	+13 dBm (nom.)	—

Without MS2850A-068 or Preamp Off, With MS2850A-076

At 18°C to 28°C, with mixer input level: -15 dBm (per wave) and using ≥ 300 kHz separation, at RBW ≤ 30 kHz

Frequency Range	Frequency Band Mode	Two-tone third-order intermodulation distortion	TOI
30 MHz $\leq$ frequency < 300 MHz	—	≤ -54 dBc	+12 dBm
300 MHz $\leq$ frequency < 3.5 GHz	—	≤ -62 dBc	+16 dBm
3.5 GHz $\leq$ frequency < 4 GHz	Normal	≤ -62 dBc	+16 dBm
	Spurious	≤ -56 dBc	+13 dBm
4 GHz $\leq$ frequency $\leq$ 6 GHz	Normal	≤ -60 dBc	+15 dBm
	Spurious	≤ -56 dBc	+13 dBm
6 GHz < frequency $\leq$ 13.5 GHz	—	≤ -56 dBc	+13 dBm
13.5 GHz < frequency $\leq$ 26.5 GHz	—	≤ -56 dBc	+13 dBm
26.5 GHz < frequency $\leq$ 40 GHz	—	≤ -56 dBc (nom.)	+13 dBm (nom.)

With MS2850A-068, Preamp On,

At 18°C to 28°C, with Preamplifier input level: -45 dBm (per wave) and using ≥ 300 kHz separation, at RBW ≤ 30 kHz

Frequency Range	Two-tone third-order intermodulation distortion	TOI
30 MHz $\leq$ frequency < 300 MHz	≤ -73 dBc (nom.)	-8.5 dBm (nom.)
300 MHz $\leq$ frequency $\leq$ 700 MHz	≤ -78 dBc (nom.)	-6 dBm (nom.)
700 MHz < frequency < 4 GHz, Frequency Band Mode: Normal 700 MHz < frequency < 3.5 GHz, Frequency Band Mode: Spurious	≤ -81 dBc (nom.)	-4.5 dBm (nom.)
4 GHz $\leq$ frequency $\leq$ 6 GHz, Frequency Band Mode: Normal 3.5 GHz $\leq$ frequency $\leq$ 4 GHz, Frequency Band Mode: Spurious	≤ -78 dBc (nom.)	-6 dBm (nom.)
6 GHz < frequency $\leq$ 13.5 GHz, Frequency Band Mode: Normal 4 GHz < frequency $\leq$ 13.5 GHz, Frequency Band Mode: Spurious	≤ -70 dBc (nom.)	-10 dBm (nom.)
13.5 GHz < frequency $\leq$ 26.5 GHz	≤ -70 dBc (nom.)	-10 dBm (nom.)
26.5 GHz < frequency $\leq$ 40 GHz	≤ -70 dBc (nom.)	-10 dBm (nom.)

Attenuator Mode: E-ATT Combined

Without MS2850A-068 or Preamp Off,

At 18°C to 28°C, with mixer input level: -15 dBm (per wave) and using ≥ 300 kHz separation, at RBW ≤ 30 kHz

Frequency Range	RF input level	Two-tone third-order intermodulation distortion	TOI
30 MHz $\leq$ frequency < 300 MHz	≤ -5 dBm	≤ -54 dBc	+12 dBm
300 MHz $\leq$ frequency $\leq$ 1 GHz	≤ -5 dBm	≤ -62 dBc	+16 dBm
1 GHz < frequency < 4 GHz, Frequency Band Mode: Normal 1 GHz < frequency < 3.5 GHz, Frequency Band Mode: Spurious	$\leq +5$ dBm	≤ -62 dBc	+16 dBm
4 GHz $\leq$ frequency $\leq$ 6 GHz, Frequency Band Mode: Normal	$\leq +5$ dBm	≤ -60 dBc	+15 dBm
3.5 GHz $\leq$ frequency $\leq$ 4 GHz, Frequency Band Mode: Spurious	$\leq +5$ dBm	≤ -56 dBc	+13 dBm
30 MHz $\leq$ frequency < 300 MHz	-5 dBm < RF input level $\leq$ 0 dBm	≤ -54 dBc (nom.)	+12 dBm (nom.)
300 MHz $\leq$ frequency < 4 GHz, Frequency Band Mode: Normal 300 MHz $\leq$ frequency < 3.5 GHz, Frequency Band Mode: Spurious	-5 dBm < RF input level $\leq$ +15 dBm	≤ -62 dBc (nom.)	+16 dBm (nom.)
4 GHz $\leq$ frequency $\leq$ 6 GHz, Frequency Band Mode: Normal	-5 dBm < RF input level $\leq$ +15 dBm	≤ -60 dBc (nom.)	+15 dBm (nom.)
3.5 GHz $\leq$ frequency $\leq$ 4 GHz, Frequency Band Mode: Spurious	-5 dBm < RF input level $\leq$ +15 dBm	≤ -56 dBc (nom.)	+13 dBm (nom.)

Image Response

Frequency Band Mode: Normal, Microwave Preselector Bypass: OFF

10 MHz $\leq$ frequency < 4 GHz	≤ -70 dBc
4 GHz $\leq$ frequency $\leq$ 6 GHz	≤ -55 dBc
6 GHz < frequency $\leq$ 13.5 GHz	≤ -70 dBc
13.5 GHz < frequency $\leq$ 26.5 GHz	≤ -70 dBc
26.5 GHz < frequency $\leq$ 44.5 GHz	≤ -70 dBc (nom.)

Sweep

Sweep mode

Continuous, Single

Sweep time

SPAN	Range
≥ 300 Hz	1 ms to 1000 s
0 Hz	1 μ s to 1000 s

Waveform display

Detector

Pos&Neg, Positive Peak, Sample, Negative Peak, RMS

Trace points

SPAN	Trace points
SPAN > 30 GHz	5001, 10001, 30001
500 MHz < SPAN $\leq$ 30 GHz	1001, 2001, 5001, 10001, 30001
100 MHz < SPAN $\leq$ 500 MHz	101, 201, 251, 401, 501, 1001, 2001, 5001, 10001, 30001
300 Hz $\leq$ SPAN $\leq$ 100 MHz and Sweep Time > 10 s	101, 201, 251, 401, 501, 1001, 2001, 5001, 10001, 30001
300 Hz $\leq$ SPAN $\leq$ 100 MHz and Sweep Time $\leq$ 10 s	11, 21, 41, 51, 101, 201, 251, 401, 501, 1001, 2001, 5001, 10001, 30001
SPAN = 0 Hz	11, 21, 41, 51, 101, 201, 251, 401, 501, 1001, 2001, 5001, 10001, 30001

Scale

Log scale

10 div/12 div: 0.1 to 20 dB/div, 1-2-5 sequence

Lin scale

10 div: 1 to 10%/div, 1-2-5 sequence

Trigger function

Trigger Mode: Free Run (Trig Off), Video, Wide IF Video, External, Frame

Gate function

Gate Mode: Off, Wide IF Video, External, Frame

Measure function

Adjust channel power (ACP)

Reference: SPAN Total, Carrier Total, Both Sides of Carriers or Carrier Select

Adjust channel specifications: 3 channels × 2 (Normal Mode), 8 channels × 2 (Advanced Mode)

Burst average

Indicates average power of specified time in the time domain mode.

Channel power

Absolute value measurement: dBm, dBm/Hz

Occupied bandwidth (OBW)

N% of Power, X dB Down

Spectrum emission mask (SEM)

Peak/Margin measurement: Pass/fail judgment is performed by Peak/Margin measurement.

Spurious emission

Worst/Peaks measurement: Pass/fail judgment is performed by Worst/Peaks measurement

Frequency counter

Counter accuracy

$\text{SPAN} \leq 1 \text{ MHz}$, $\text{RBW} = 1 \text{ kHz}$, $\text{S/N} \geq 50 \text{ dB}$, $\text{Gate Time} \geq 100 \text{ ms}$

$\pm (\text{marker frequency} \times \text{reference frequency accuracy} + (0.1 \times \text{N/Gate Time [s]})) \text{ Hz}$

N: Mixer harmonic order

Two-tone third-order intermodulation distortion

Measures IM3 and TOI from two-tone signal.

Model/Name

Model	Name	Note
MS2850A-032	Analysis Bandwidth 255 MHz	Standard function
MS2850A-033	Analysis Bandwidth Extension 510 MHz	Option
MS2850A-034	Analysis Bandwidth Extension 1 GHz	Option

Performance guarantee frequency range

Bandwidth ≤ 31.25 MHz

Model	Frequency Range
MS2850A-047	9 kHz to 32 GHz
MS2850A-046	9 kHz to 44.5 GHz

Bandwidth > 31.25 MHz

Model	Frequency Range
MS2850A-047	800 MHz to 32 GHz
MS2850A-046	800 MHz to 44.5 GHz

Function

Trace mode

Spectrum, Power vs. Time, Frequency vs. Time, CCDF, Spectrogram, Phase vs. Time, No Trace

SPAN

Conditions for measurable waveform data: I, Q (Binary)

SPAN	Sampling Rate	Maximum Capture Time	Options
1 kHz	2 kHz	2000 s	MS2850A-032/033/034
2.5 kHz	5 kHz	2000 s	MS2850A-032/033/034
5 kHz	10 kHz	2000 s	MS2850A-032/033/034
10 kHz	25 kHz	2000 s	MS2850A-032/033/034
25 kHz	50 kHz	2000 s	MS2850A-032/033/034
50 kHz	100 kHz	1000 s	MS2850A-032/033/034
100 kHz	200 kHz	500 s	MS2850A-032/033/034
250 kHz	500 kHz	200 s	MS2850A-032/033/034
500 kHz	1 MHz	100 s	MS2850A-032/033/034
1 MHz	2 MHz	50 s	MS2850A-032/033/034
2.5 MHz	5 MHz	20 s	MS2850A-032/033/034
5 MHz	10 MHz	10 s	MS2850A-032/033/034
10 MHz	20 MHz	5 s	MS2850A-032/033/034
25 MHz	50 MHz	2 s	MS2850A-032/033/034
31.25 MHz	50 MHz	2 s	MS2850A-032/033/034
50 MHz	81.25 MHz	48 s	MS2850A-032/033/034
62.5 MHz	81.25 MHz	48 s	MS2850A-032/033/034
100 MHz	162.5 MHz	24 s	MS2850A-032/033/034
125 MHz	162.5 MHz	24 s	MS2850A-032/033/034
255 MHz	325 MHz	12 s	MS2850A-032/033/034
510 MHz	650 MHz	6 s	MS2850A-033/034
1000 MHz	1300 MHz	3 s	MS2850A-034

Capture function

Capture Time Length: Sets the capture time length
Setting mode: Auto, Manual

Trigger

Trigger mode: Free Run (Trig Off), Video, Wide IF Video, Frame, External (TTL)

ADC resolution

Bandwidth	ADC resolution
≤31.25 MHz	16 bits
>31.25 MHz	12 bits

Spectrum displayed function

Displays the spectrum for arbitrary time length and frequency range in the acquired waveform data.

Analysis time length

Analysis Start Time	Sets analysis start time point from waveform data header
Analysis Time Length	Sets analysis time length
Setting mode	Auto, Manual

Frequency

Center frequency and SPAN can be set within the frequency range in waveform data.

Frequency setting

	Bandwidth ≤31.25 MHz	31.25 MHz < Bandwidth ≤ 510 MHz	Bandwidth = 1 GHz
MS2850A-047	0 MHz to 32 GHz	100 MHz to 32 GHz	4.2 GHz to 32 GHz
MS2850A-046	0 MHz to 44.5 GHz	100 MHz to 44.5 GHz	4.2 GHz to 44.5 GHz

Display frequency accuracy

$\pm (\text{Indicator frequency} \times \text{reference frequency accuracy} + \text{SPAN frequency} \times \text{reference frequency accuracy} + \text{RBW} \times 0.05 + 2 \times N + \text{SPAN frequency}/(\text{Trace points} - 1)) \text{ Hz}$

N: Mixer harmonic order

Resolution bandwidth (RBW)

	Bandwidth ≤31.25 MHz	50 MHz ≤ Bandwidth ≤ 62.5 MHz	Bandwidth ≥100 MHz
Setting range	1 Hz to 1 MHz (1-3 sequence)	3 kHz to 3 MHz (1-3 sequence)	10 kHz to 10 MHz (1-3 sequence)
Selectivity	(-60 dB/-3 dB) 4.5: 1 (nom.)	(-60 dB/-3 dB) 4.5: 1 (nom.)	(-60 dB/-3 dB) 4.5: 1 (nom.)

Amplitude

Total level accuracy

At 18°C to 28°C, RBW: Auto, Time Detection: Average, Marker Result: Integration or Peak (Accuracy), Center frequency, CW, Excluding the noise floor effect,

Preamp Off: Input attenuator ≥10 dB, Mixer Input Level ≤ -10 dBm,

Preamp On: Input attenuator = 10 dB, Preamp Input Level ≤ -30 dBm,

The total level accuracy is calculated from an RSS (root summed square) error of the RF frequency characteristics, linear error and input attenuator switching error.

Frequency Range	Microwave Preselector Bypass: Off		
	Without MS2850A-068 or With MS2850A-068 and Preamp: Off		With MS2850A-068 and Preamp: On
	Bandwidth ≤31.25 MHz	Bandwidth >31.25 MHz	
300 kHz ≤ frequency < 4 GHz, Frequency Band Mode: Normal 300 kHz ≤ frequency < 3.5 GHz, Frequency Band Mode: Spurious	±0.5 dB	±0.6 dB	±1.0 dB
4 GHz ≤ frequency ≤ 6 GHz, Frequency Band Mode: Normal 3.5 GHz ≤ frequency ≤ 4 GHz, Frequency Band Mode: Spurious	±1.8 dB		±1.8 dB
6 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Normal 4 GHz < frequency ≤ 13.8 GHz, Frequency Band Mode: Spurious	±1.8 dB		±2.0 dB
13.8 GHz < frequency ≤ 26.5 GHz	±3.0 dB		±3.0 dB
26.5 GHz < frequency ≤ 40 GHz	±3.0 dB		±4.0 dB
40 GHz < frequency ≤ 44.5 GHz	±3.5 dB (nom.)		±4.0 dB (nom.)

Bandwidth ≤ 31.25 MHz, Signal Analyzer mode

Frequency Range	Frequency Band Mode	Microwave Preselector Bypass: On		
		Without MS2850A-068 or With MS2850A-068 and Preamp: Off		With MS2850A-068, Preamp: On
		Specification	95th percentile	Specification
4 GHz < frequency $\leq$ 6 GHz	Spurious	± 1.4 dB	± 0.28 dB	± 1.9 dB
6 GHz < frequency $\leq$ 13.8 GHz	Normal	± 1.4 dB	± 0.26 dB	± 1.9 dB
	Spurious		± 0.28 dB	
13.8 GHz < frequency $\leq$ 26.5 GHz	—	± 2.0 dB	± 0.41 dB	± 2.7 dB
26.5 GHz < frequency $\leq$ 40 GHz	—	± 2.5 dB	± 0.75 dB	± 3.7 dB
40 GHz < frequency $\leq$ 44.5 GHz	—	± 2.5 dB (nom.)	—	± 3.7 dB (nom.)

Bandwidth > 31.25 MHz, Signal Analyzer mode

Frequency Range	Microwave Preselector Bypass: On		
	Without MS2850A-068 or With MS2850A-068 and Preamp: Off		With MS2850A-068 and Preamp: On
	Specification	95th percentile	Specification
4 GHz $\leq$ frequency $\leq$ 13.8 GHz	± 1.4 dB	± 0.40 dB	± 1.9 dB
13.8 GHz < frequency $\leq$ 26.5 GHz	± 2.0 dB	± 0.46 dB	± 2.7 dB
26.5 GHz < frequency $\leq$ 40 GHz	± 2.5 dB	± 0.86 dB	± 3.7 dB
40 GHz < frequency $\leq$ 44.5 GHz	± 2.5 dB (nom.)	—	± 3.7 dB (nom.)

In-band frequency characteristics


Bandwidth ≤ 31.25 MHz, On the basis of a level of the center frequency, at 18°C to 28°C

Center frequency	Frequency offset	In-band frequency characteristics
30 MHz $\leq$ frequency $\leq$ 4 GHz, Frequency Band Mode: Normal 30 MHz $\leq$ frequency < 3.5 GHz, Frequency Band Mode: Spurious	Center frequency ± 10 MHz	± 0.31 dB

Bandwidth > 31.25 MHz, On the basis of a level of the center frequency

Center frequency	Frequency offset	In-band frequency characteristics
4.2 GHz $\leq$ frequency < 5 GHz	Center frequency ± 50 MHz	± 0.3 dB (nom.)
	Center frequency ± 255 MHz	± 0.7 dB (nom.)
5 GHz $\leq$ frequency $\leq$ 18.5 GHz	Center frequency ± 50 MHz	± 0.3 dB (nom.)
	Center frequency ± 500 MHz	± 0.7 dB (nom.)
18.5 GHz < frequency $\leq$ 26.5 GHz	Center frequency ± 50 MHz	± 0.3 dB (nom.)
	Center frequency ± 500 MHz	± 1.0 dB (nom.)
26.5 GHz < frequency $\leq$ 32 GHz	Center frequency ± 50 MHz	± 0.3 dB (nom.)
	Center frequency ± 500 MHz	± 1.2 dB (nom.)
32 GHz < frequency $\leq$ 44.5 GHz	Center frequency ± 50 MHz	± 0.3 dB (nom.)
	Center frequency ± 500 MHz	± 1.25 dB (nom.)

Inband frequency response without MS2850A-068 (meas.)

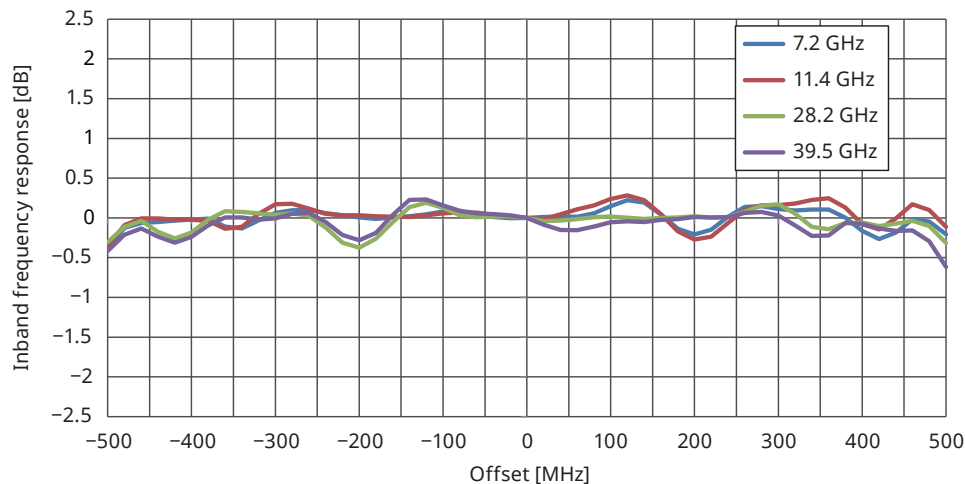

In-band phase linearity

Deviation from linear phase characteristics

Bandwidth >31.25 MHz, Attenuator :10 dB, Offset frequency $\leq$ Center frequency ± 500 MHz

Preamp Off, Reference Level ≤ 0 dBm

4.2 GHz $\leq$ Center frequency $\leq$ 5.14 GHz	5°p-p (nom.)
5.14 GHz < Center frequency $\leq$ 42.1 GHz	5°p-p (nom.)
42.1 GHz < Center frequency $\leq$ 44.5 GHz	6°p-p (nom.)

Preamp: On, Reference Level ≤ -20 dBm

4.2 GHz $\leq$ Center frequency $\leq$ 5.14 GHz	7°p-p (nom.)
5.14 GHz < Center frequency $\leq$ 42.1 GHz	6°p-p (nom.)
42.1 GHz < Center frequency $\leq$ 44.5 GHz	6°p-p (nom.)

Image response

Bandwidth >31.25 MHz

800 MHz $\leq$ frequency $\leq$ 4.2 GHz	-60 dBc* ¹
4.2 GHz < frequency $\leq$ 44.5 GHz	0 dBc (nom.)* ²
4.2 GHz < frequency $\leq$ 44.5 GHz	-60 dBc* ¹

*1: To be generated at a frequency that is $(650 \text{ MHz} \pm \text{BW}/2) \times 2$ MHz away.

*2: To be generated at a frequency that is $(1950 \text{ MHz} \pm \text{BW}/2) \times 2$ MHz away.

BW: Input signal bandwidth

RF frequency characteristics

Refer to "RF frequency characteristics" of Signal Analyzer/Spectrum Analyzer.


Linearity error

Refer to "Linearity error" of Signal Analyzer/Spectrum Analyzer.

Spurious free dynamic range due to ADC (SFDR)


Input level: ADC full scale - 14 dB at center frequency, Bandwidth >31.25 MHz, within measurement bandwidth

Frequency range	SFDR
800 MHz $\leq$ frequency < 4.2 GHz	-60 dBc (nom.)
4.2 GHz $\leq$ frequency $\leq$ 44.5 GHz	-70 dBc (nom.)

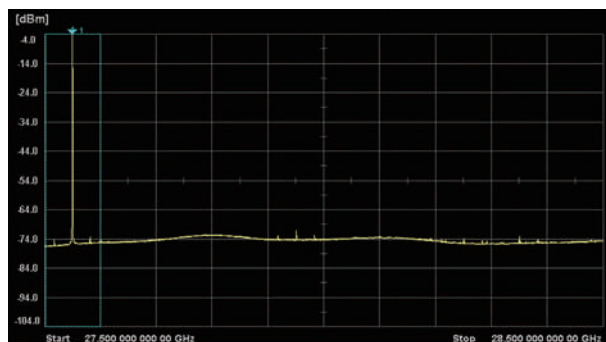

ADC clipping level

Nominal ADC Clipping vs. Input Mixer Level (meas.)

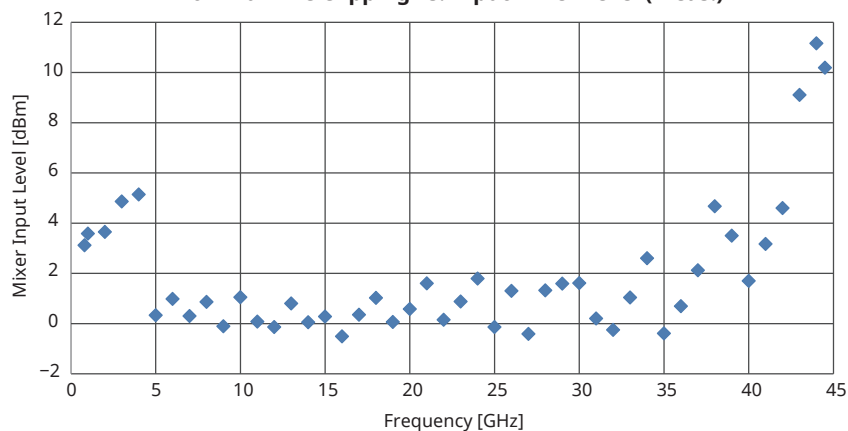

IF output

Refer to "IF output" of Connector.

Display average noise level (DANL)

■ Bandwidth ≤ 31.25 MHz

At 18°C to 28°C, Time Detection : Average, Input attenuator: 0 dB, Center frequency, Excluding the residual response effect

Without MS2850A-068, Without MS2850A-076,

Microwave Preselector Bypass: On/Off Common, Frequency Band Mode: Normal
or

Without MS2850A-068, With MS2850A-076,

Microwave Preselector Bypass: On, Frequency Band Mode: Normal

Frequency Range	DANL (Bandwidth ≤ 31.25 MHz)
100 kHz	-131.5 dBm/Hz
1 MHz	-141.5 dBm/Hz
30 MHz $\leq$ frequency < 1 GHz	-150.5 dBm/Hz
1 GHz $\leq$ frequency < 2.4 GHz	-147.5 dBm/Hz
2.4 GHz $\leq$ frequency $\leq$ 3.5 GHz	-144.5 dBm/Hz
3.5 GHz < frequency $\leq$ 4 GHz	-141.5 dBm/Hz
4 GHz < frequency $\leq$ 6 GHz	-141.5 dBm/Hz
6 GHz < frequency $\leq$ 13 GHz	-143.5 dBm/Hz
13 GHz < frequency $\leq$ 18.3 GHz	-141.5 dBm/Hz
18.3 GHz < frequency $\leq$ 26.5 GHz	-137.5 dBm/Hz
26.5 GHz < frequency $\leq$ 34 GHz	-137.5 dBm/Hz
34 GHz < frequency $\leq$ 40 GHz	-133.5 dBm/Hz
40 GHz < frequency $\leq$ 44.5 GHz	-127.5 dBm/Hz (nom.)

With MS2850A-068 and Preamp: Off, Without MS2850A-076,

Microwave Preselector Bypass: On/Off Common, Frequency Band Mode: Normal
or

With MS2850A-068 and Preamp: Off, With MS2850A-076

Microwave Preselector Bypass: On, Frequency Band Mode: Normal

Frequency Range	DANL (Bandwidth ≤ 31.25 MHz)
100 kHz	-131.5 dBm/Hz
1 MHz	-141.5 dBm/Hz
30 MHz $\leq$ frequency < 1 GHz	-150.5 dBm/Hz
1 GHz $\leq$ frequency < 2.4 GHz	-147.5 dBm/Hz
2.4 GHz $\leq$ frequency $\leq$ 3.5 GHz	-144.5 dBm/Hz
3.5 GHz < frequency $\leq$ 4 GHz	-141.5 dBm/Hz
4 GHz < frequency $\leq$ 6 GHz	-141.5 dBm/Hz
6 GHz < frequency $\leq$ 13 GHz	-139.5 dBm/Hz
13 GHz < frequency $\leq$ 18.3 GHz	-137.5 dBm/Hz
18.3 GHz < frequency $\leq$ 26.5 GHz	-133.5 dBm/Hz
26.5 GHz < frequency $\leq$ 34 GHz	-132.5 dBm/Hz
34 GHz < frequency $\leq$ 40 GHz	-128.5 dBm/Hz
40 GHz < frequency $\leq$ 44.5 GHz	-122.5 dBm/Hz (nom.)

Frequency Range	DANL (Bandwidth ≤ 31.25 MHz)	
	With MS2850A-068, Preamp: On Frequency Band Mode: Normal	
	Microwave Preselector Bypass: Off	Microwave Preselector Bypass: On
100 kHz	-147 dBm/Hz (nom.)	-147 dBm/Hz (nom.)
1 MHz	-153.5 dBm/Hz	-153.5 dBm/Hz
30 MHz $\leq$ frequency < 1 GHz	-163.5 dBm/Hz	-163.5 dBm/Hz
1 GHz $\leq$ frequency < 2 GHz	-161.5 dBm/Hz	-161.5 dBm/Hz
2 GHz $\leq$ frequency $\leq$ 3.5 GHz	-160.5 dBm/Hz	-160.5 dBm/Hz
3.5 GHz < frequency $\leq$ 4 GHz	-157.5 dBm/Hz	-157.5 dBm/Hz
4 GHz < frequency $\leq$ 6 GHz	-157.5 dBm/Hz	-157.5 dBm/Hz
6 GHz < frequency $\leq$ 13 GHz	-160.5 dBm/Hz	-157.5 dBm/Hz
13 GHz < frequency $\leq$ 18.3 GHz	-159.5 dBm/Hz	-156.5 dBm/Hz
18.3 GHz < frequency $\leq$ 26.5 GHz	-156.5 dBm/Hz	-152.5 dBm/Hz
26.5 GHz < frequency $\leq$ 34 GHz	-153.5 dBm/Hz	-149.5 dBm/Hz
34 GHz < frequency $\leq$ 40 GHz	-150.5 dBm/Hz	-146.5 dBm/Hz
40 GHz < frequency $\leq$ 44.5 GHz	-142.5 dBm/Hz (nom.)	-139.5 dBm/Hz (nom.)

Without MS2850A-068 or With MS2850A-068 and Preamp: Off, With MS2850A-076,
Microwave Preselector Bypass: Off, Frequency Band Mode: Normal

Frequency Range	DANL (Bandwidth ≤ 31.25 MHz)
100 kHz	-131.5 dBm/Hz
1 MHz	-141.5 dBm/Hz
30 MHz $\leq$ frequency < 1 GHz	-150.5 dBm/Hz
1 GHz $\leq$ frequency < 2.4 GHz	-147.5 dBm/Hz
2.4 GHz $\leq$ frequency $\leq$ 3.5 GHz	-144.5 dBm/Hz
3.5 GHz < frequency $\leq$ 4 GHz	-141.5 dBm/Hz
4 GHz < frequency $\leq$ 6 GHz	-141.5 dBm/Hz
6 GHz < frequency $\leq$ 13 GHz	-147.5 dBm/Hz
13 GHz < frequency $\leq$ 18.3 GHz	-142.5 dBm/Hz
18.3 GHz < frequency $\leq$ 26.5 GHz	-138.5 dBm/Hz
26.5 GHz < frequency $\leq$ 34 GHz	-138.5 dBm/Hz
34 GHz < frequency $\leq$ 40 GHz	-136.5 dBm/Hz
40 GHz < frequency $\leq$ 44.5 GHz	-131.5 dBm/Hz (nom.)

■ Bandwidth > 31.25 MHz

At 18°C to 28°C, Time Detection : Average, Input attenuator: 0 dB, Center frequency, Excluding the residual response effect
Microwave Preselector Bypass is set as On automatically when Bandwidth is set greater than 31.25 MHz.

Frequency Range	DANL (Bandwidth > 31.25 MHz)	
	Without MS2850A-068 Frequency Band Mode: Normal	
	Without MS2850A-076	With MS2850A-076
800 MHz $\leq$ frequency < 1 GHz	-142 dBm/Hz	-142 dBm/Hz
1 GHz $\leq$ frequency < 2.4 GHz	-141 dBm/Hz	-141 dBm/Hz
2.4 GHz $\leq$ frequency $\leq$ 3.5 GHz	-140 dBm/Hz	-140 dBm/Hz
3.5 GHz < frequency < 4.2 GHz	-138 dBm/Hz	-138 dBm/Hz
4.2 GHz $\leq$ frequency $\leq$ 4.6 GHz	-138 dBm/Hz	-137 dBm/Hz
4.6 GHz < frequency $\leq$ 6 GHz	-142 dBm/Hz	-141 dBm/Hz
6 GHz < frequency $\leq$ 13 GHz	-141 dBm/Hz	-140 dBm/Hz
13 GHz < frequency $\leq$ 17 GHz	-141 dBm/Hz	-140 dBm/Hz
17 GHz < frequency $\leq$ 18.5 GHz	-139 dBm/Hz	-137 dBm/Hz
18.5 GHz < frequency $\leq$ 26.5 GHz	-139 dBm/Hz	-137 dBm/Hz
26.5 GHz < frequency $\leq$ 34 GHz	-138 dBm/Hz	-136 dBm/Hz
34 GHz < frequency $\leq$ 40 GHz	-137 dBm/Hz	-135 dBm/Hz
40 GHz < frequency $\leq$ 44.5 GHz	-130 dBm/Hz (nom.)	-130 dBm/Hz (nom.)

Frequency Range	DANL (Bandwidth >31.25 MHz)			
	With MS2850A-068, Without MS2850A-076			
	Frequency Band Mode: Normal			
	Preamp: Off		Preamp: On	
	Specification	95th percentile	Specification	95th percentile
800 MHz ≤ frequency < 1 GHz	–142 dBm/Hz	–142 dBm/Hz	–161 dBm/Hz	–161 dBm/Hz
1 GHz ≤ frequency < 2.4 GHz	–141 dBm/Hz	–141 dBm/Hz	–160 dBm/Hz	–160 dBm/Hz
2.4 GHz ≤ frequency ≤ 3.5 GHz	–140 dBm/Hz	–140 dBm/Hz	–159 dBm/Hz	–159 dBm/Hz
3.5 GHz < frequency < 4.2 GHz	–138 dBm/Hz	–139 dBm/Hz	–157 dBm/Hz	–158 dBm/Hz
4.2 GHz ≤ frequency ≤ 4.6 GHz	–138 dBm/Hz	–139 dBm/Hz	–155 dBm/Hz	–156 dBm/Hz
4.6 GHz < frequency ≤ 6 GHz	–141 dBm/Hz	–142 dBm/Hz	–155 dBm/Hz	–158 dBm/Hz
6 GHz < frequency ≤ 13 GHz	–140 dBm/Hz	–141 dBm/Hz	–155 dBm/Hz	–158 dBm/Hz
13 GHz < frequency ≤ 17 GHz	–140 dBm/Hz	–140 dBm/Hz	–155 dBm/Hz	–157 dBm/Hz
17 GHz < frequency ≤ 18.5 GHz	–135 dBm/Hz	–140 dBm/Hz	–152 dBm/Hz	–157 dBm/Hz
18.5 GHz < frequency ≤ 26.5 GHz	–135 dBm/Hz	–137 dBm/Hz	–152 dBm/Hz	–154 dBm/Hz
26.5 GHz < frequency ≤ 34 GHz	–135 dBm/Hz	–138 dBm/Hz	–150 dBm/Hz	–153 dBm/Hz
34 GHz < frequency ≤ 40 GHz	–132 dBm/Hz	–134 dBm/Hz	–146 dBm/Hz	–149 dBm/Hz
40 GHz < frequency ≤ 44.5 GHz	–125 dBm/Hz (nom.)	—	–138 dBm/Hz (nom.)	—

Frequency Range	DANL (Bandwidth >31.25 MHz)	
	With MS2850A-068, With MS2850A-076	
	Frequency Band Mode: Normal	
	Preamp: Off	Preamp: On
800 MHz ≤ frequency < 1 GHz	–142 dBm/Hz	–161 dBm/Hz
1 GHz ≤ frequency < 2.4 GHz	–141 dBm/Hz	–160 dBm/Hz
2.4 GHz ≤ frequency ≤ 3.5 GHz	–140 dBm/Hz	–159 dBm/Hz
3.5 GHz < frequency < 4.2 GHz	–138 dBm/Hz	–157 dBm/Hz
4.2 GHz ≤ frequency ≤ 4.6 GHz	–138 dBm/Hz	–155 dBm/Hz
4.6 GHz < frequency ≤ 6 GHz	–141 dBm/Hz	–155 dBm/Hz
6 GHz < frequency ≤ 13 GHz	–140 dBm/Hz	–155 dBm/Hz
13 GHz < frequency ≤ 17 GHz	–140 dBm/Hz	–155 dBm/Hz
17 GHz < frequency ≤ 18.5 GHz	–135 dBm/Hz	–152 dBm/Hz
18.5 GHz < frequency ≤ 26.5 GHz	–135 dBm/Hz	–152 dBm/Hz
26.5 GHz < frequency ≤ 34 GHz	–135 dBm/Hz	–150 dBm/Hz
34 GHz < frequency ≤ 40 GHz	–132 dBm/Hz	–146 dBm/Hz
40 GHz < frequency ≤ 44.5 GHz	–125 dBm/Hz (nom.)	–138 dBm/Hz (nom.)

Measure function

Adjacent channel power (ACP)

Reference: SPAN Total, Carrier Total, Both Sides of Carriers, or Carrier Select

Adjacent channel specification: 3 channels × 2

Channel power

Absolute value measurement: dBm, dBm/Hz

Occupied Bandwidth (OBW)

N% of Power, X dB Down

Power vs. Time

Indicates time changes of power for captured waveform data.

Analysis time range

Analysis start time	Sets analysis start time position from beginning of waveform data
Analysis time length	Sets analysis time length
Setting mode	Auto, Manual

Resolution bandwidth

Filter type	Rect, Gaussian, Nyquist, Root Nyquist, Off (default Off)
Roll-off ratio	0.01 to 1 (set for Nyquist, Root Nyquist)
Filter frequency offset	Set center frequency of filter in wavelength data frequency band

Measure function

Peak to Peak measurement
with AM Depth or marker function
+Peak, -Peak, (P-P)/2, Average
Burst Average Power
Measures average power of burst signal.

Frequency vs. Time

Displays frequency time fluctuations of input signal from captured waveform data.

Analysis time range

Analysis start time	Sets analysis start time point from waveform data header
Analysis time length	Sets analysis time length
Setting mode	Auto, Manual

Operating level range

-17 to +30 dBm (Input attenuator ≥ 10 dB)

Frequency (vertical axis)

Center frequency and SPAN can be set within the frequency range in waveform data
Display frequency range: Selectable from 1/25, 1/10, 1/5 and 1/2 of analysis bandwidth

Displayed frequency accuracy

$\text{SPAN} \leq 31.25 \text{ MHz}$, Scale = $\text{SPAN}/25$, CW
 $\pm (\text{reference oscillator accuracy} \times \text{center frequency} + \text{indicator frequency range} \times 0.01) \text{ Hz}$

Measure function

Peak to Peak measurement
Measured using FM Deviation or marker function.
+Peak, -Peak, (P-P)/2, Average

Phase vs. Time

Displays frequency time fluctuations of input signal from captured waveform data.

Analysis time range

Analysis start time	Sets analysis start time point from waveform data header
Analysis time length	Sets analysis time length
Setting mode	Auto, Manual

Phase (vertical axis)

Display mode	Wrap, Unwrap
Displayed phase range	0.01 deg./div to 200 G deg./div
Offset	-100 to +100 Mdeg.

CCDF

Displays CCDF and APD of waveform data captured at specific time.

Analysis time range

Analysis start time	Sets analysis start time point from waveform data header
Analysis time length	Sets analysis time length
Setting mode	Auto, Manual

Display

Graphically displays CCDF and APD.

Histogram resolution: 0.01 dB

Numerical value: Average Power, Max Power, Crest Factor

Resolution bandwidth

Filter type: Rectangle, Off (Default Off)

Filter frequency offset: Sets filter center frequency in frequency band of waveform data

Spectrogram

Displayed spectrogram for arbitrary time length in captured waveform data.

Analysis time range

Analysis start time	Sets analysis start time point from waveform data header
Analysis time length	Sets analysis time length
Setting mode	Auto, Manual

Frequency

Center frequency and SPAN can be set within the frequency range in waveform data.

Resolution bandwidth (RBW)

Setting range	1 Hz to 10 MHz (1-3 sequence)
Selectivity	(-60 dB/-3 dB) 4.5: 1 (nom.)

Replay function

Analyzes traces of saved waveform data

Conditions for measurable waveform data: I, Q (Binary)

SPAN	Sampling rate	Minimum capture sample (time)	Options
1 kHz	2 kHz	74000 (37 s)	MS2850A-032/033/034
2.5 kHz	5 kHz	160000 (32 s)	MS2850A-032/033/034
5 kHz	10 kHz	310000 (31 s)	MS2850A-032/033/034
10 kHz	25 kHz	610000 (30.5 s)	MS2850A-032/033/034
25 kHz	50 kHz	730000 (14.6 s)	MS2850A-032/033/034
50 kHz	100 kHz	730000 (7.3 s)	MS2850A-032/033/034
100 kHz	200 kHz	730000 (3.65 s)	MS2850A-032/033/034
250 kHz	500 kHz	730000 (1.46 s)	MS2850A-032/033/034
500 kHz	1 MHz	730000 (730 ms)	MS2850A-032/033/034
1 MHz	2 MHz	730000 (365 ms)	MS2850A-032/033/034
2.5 MHz	5 MHz	730000 (146 ms)	MS2850A-032/033/034
5 MHz	10 MHz	730000 (73 ms)	MS2850A-032/033/034
10 MHz	20 MHz	730000 (36.5 ms)	MS2850A-032/033/034
25 MHz	50 MHz	730000 (14.6 ms)	MS2850A-032/033/034
31.25 MHz	50 MHz	730000 (14.6 ms)	MS2850A-032/033/034
50 MHz	81.25 MHz	730000 (8.99 ms)	MS2850A-032/033/034
62.5 MHz	81.25 MHz	730000 (8.99 ms)	MS2850A-032/033/034
100 MHz	162.5 MHz	730000 (4.5 ms)	MS2850A-032/033/034
125 MHz	162.5 MHz	730000 (4.5 ms)	MS2850A-032/033/034
255 MHz	325 MHz	730000 (2.25 ms)	MS2850A-032/033/034
510 MHz	650 MHz	730000 (1.13 ms)	MS2850A-033/034
1000 MHz	1300 MHz	730000 (562 μ s)	MS2850A-034


RF input

Front panel, K-J, 50Ω
VSWR: Input attenuator ≥10 dB, at 18° to 28°C


40 MHz ≤ frequency ≤ 3 GHz	≤1.2 (nom.)
3 GHz < frequency ≤ 6 GHz	≤1.3 (nom.)
6 GHz < frequency ≤ 13.6 GHz	≤1.3 (nom.)
13.6 GHz < frequency ≤ 26.5 GHz	≤1.4 (nom.)
26.5 GHz < frequency ≤ 40 GHz	≤1.6 (nom.)
40 GHz < frequency ≤ 44.5 GHz	≤1.6 (reference data)*

*: Including effect of V-K conversion adaptor which is attached RF input connector.


VSWR (meas.) (ATT: 0 dB, Preamp: Off, ≤ 6 GHz, 3 Units)

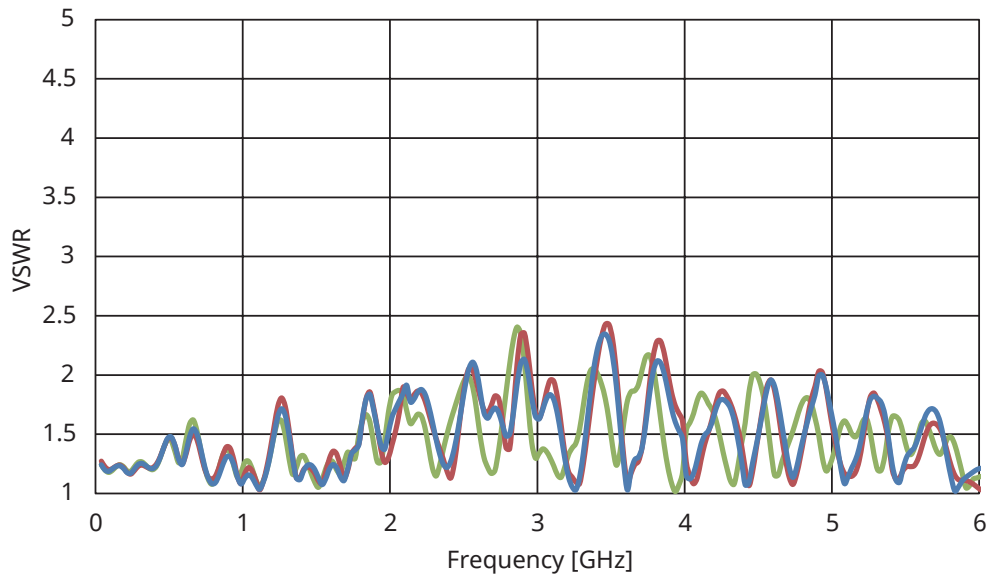


VSWR (meas.) (ATT: 0 dB, Preamp: Off, > 6 GHz, Microwave Preselector Bypass: Off, 3 Units)

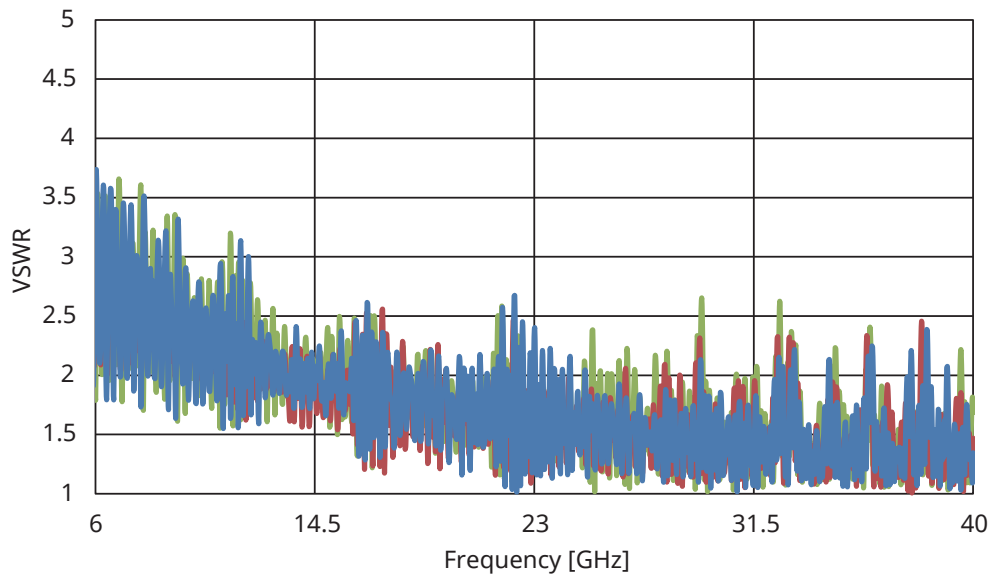


VSWR (meas.) (ATT: 0 dB, Preamp: Off, > 6 GHz, Microwave Preselector Bypass: On, 3 Units)

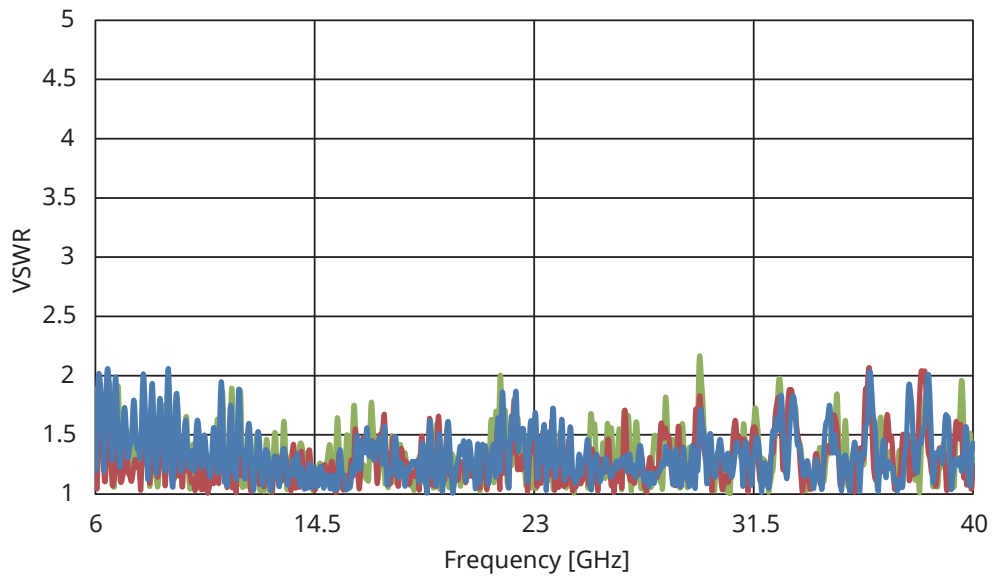


VSWR (meas.) (ATT: 0 dB, Preamp: On, ≤ 6 GHz, 3 Units)

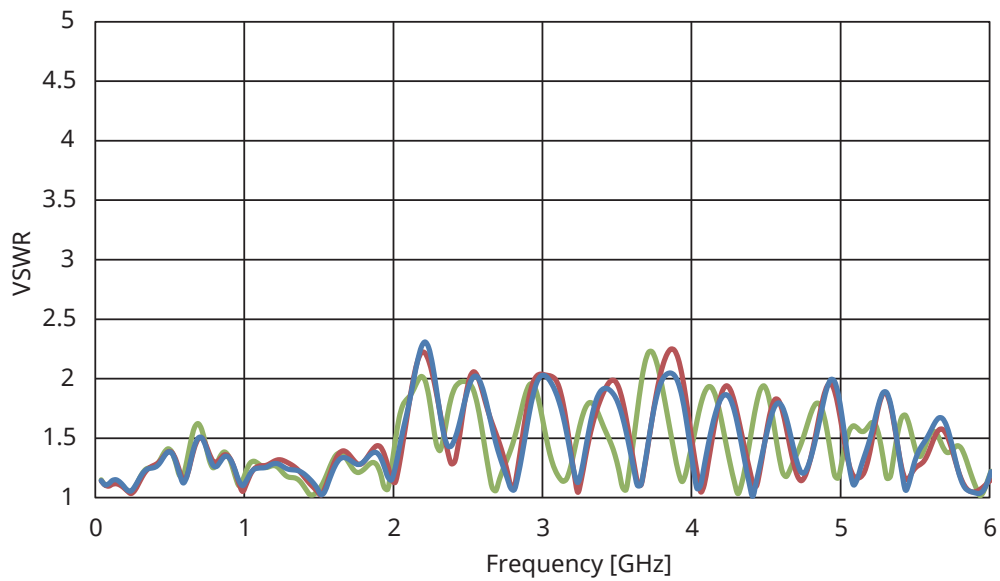

VSWR (meas.) (ATT: 0 dB, Preamp: On, > 6 GHz, Microwave Preselector Bypass: Off, 3 Units)

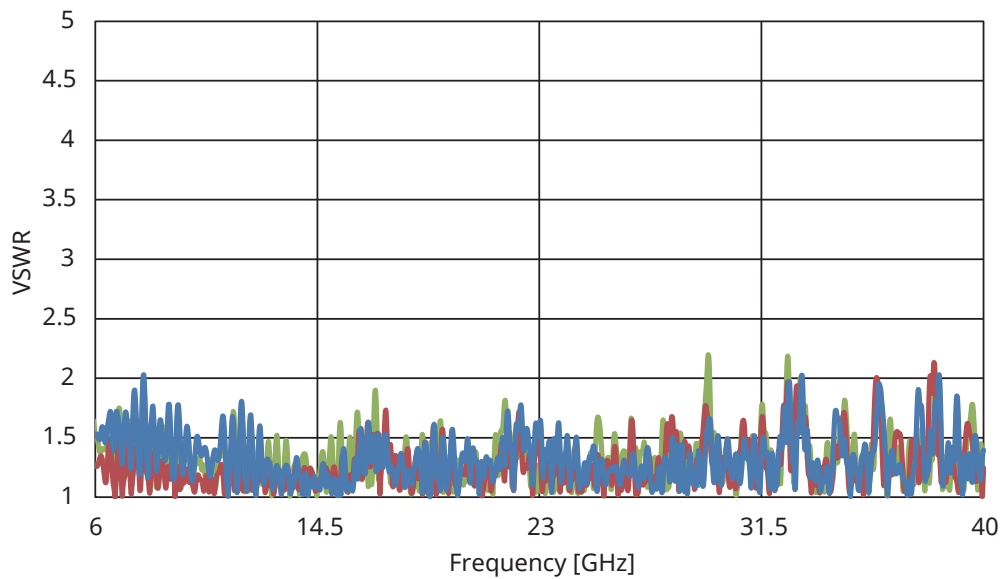

VSWR (meas.) (ATT: 0 dB, Preamp: On, > 6 GHz, Microwave Preselector Bypass: On, 3 Units)

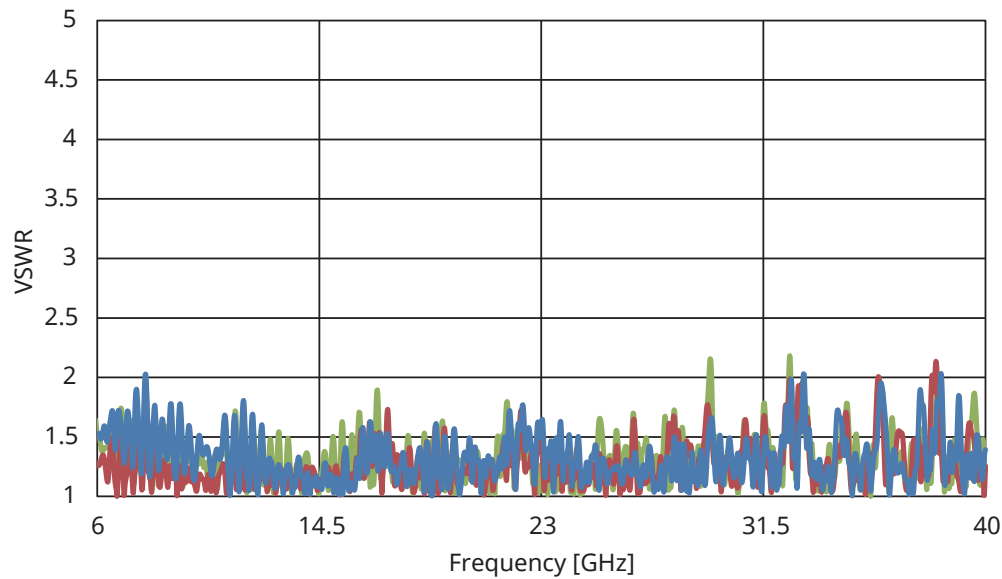

External reference input

Connector	Rear panel, BNC-J, 50Ω (nom.)
Frequency	5 MHz/10 MHz/13 MHz
Operating range	±1 ppm
Input level	−15 dBm ≤ level ≤ +20 dBm, 50Ω (AC coupling)

Reference signal output

Connector	Rear panel, BNC-J, 50Ω (nom.)
Frequency	10 MHz
Output level	≥0 dBm (AC coupling)

Sweep status output

Connector	Rear panel, BNC-J
Output level	TTL level (High level at sweep or capture)

SA trigger input

Rear Panel: 2 ports, BNC-J

Connector	Name	Trigger Level
Trigger1	SA Trigger Input	TTL Level
Trigger2	Trigger Input 2	LVC MOS

SA trigger output

Connector	BNC-J (rear panel 2 port)
Output level	LVC MOS

External controls

Ethernet (10/100/1000Base-T)

Connector: Rear Panel, RJ-45

GPIO

IEEE488.2 compatible

Connector	Rear panel, IEEE488 bus
Interface function	SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT0, C0, E2

USB (B)

USB2.0

Connector: USB-B Connector (rear panel 1 port)

USB (A)

USB2.0 compatible

Enables waveform hard copy to USB compatible external device and saving main unit setting parameters

Connector: USB-A Connector (front panel 2 port, rear panel 2 port)

Monitor output

Connector: Rear panel, VGA compatible, mini D-SUB 15 pin

AUX (for future extension)

Not available at present.

Used for the input/output of an auxiliary device.

Connector: Rear panel, 50 pin (Correspond to DX10A-50S)

IF output

Connector for the 1st IF output, Outputs the signal before band filtering.

Connector	Rear panel, SMA-J, 50Ω (nom.)
Output frequency	1875 MHz: Spectrum Analyzer mode, Signal Analyzer mode (Bandwidth ≤31.25 MHz) 1950 MHz: Signal Analyzer mode (Bandwidth >31.25 MHz)
Max Bandwidth (6 dB)	2.5 GHz (nom.)
Gain	-10 dB (nom.) (ATT 0 dB, at input frequency 10 GHz)

1st local output

Connector for External Mixer

Connector	Front panel, SMA-J, 50Ω (nom.)
Frequency	Local signal frequency: 5 GHz to 10 GHz IF signal: frequency: 1875 MHz
Level	Local signal level ≥10 dBm (typ.)
Bias current	Setting range: 0.0 to 20.0 mA Resolution: 0.1 mA

Noise source

Connector for external noise source.

This is available when the MS2850A-017 is installed.

Connector	Rear panel, BNC-J
Output voltage range	+28 V $\pm$ 0.5 V, Pulsed

Supports noise sources from Noisecom NC346 series. NC346 series models and summary specifications are listed below.

Operation is not guaranteed when using other noise sources.

See the NC346 series catalog and datasheet for detailed specifications.

NC346 series summary specifications

Model	RF Connector	Frequency [GHz]	Output ENR [dB]	VSWR (maximum @ on/off) [GHz]				DC Offset	DC Block
				0.01 to 5	5 to 18	18 to 26.5	26.5 to 40		
NC346A	SMA (M)	0.01 to 18.0	5 to 7	1.15:1	1.25:1	—	—	No	Not required
NC346A Precision	APC3.5 (M)	0.01 to 18.0	5 to 7	1.15:1	1.25:1	—	—	No	Not required
NC346A Option 1	N (M)	0.01 to 18.0	5 to 7	1.15:1	1.25:1	—	—	No	Not required
NC346A Option 2	APC7	0.01 to 18.0	5 to 7	1.15:1	1.25:1	—	—	No	Not required
NC346A Option 4	N (F)	0.01 to 18.0	5 to 7	1.15:1	1.25:1	—	—	No	Not required
NC346B	SMA (M)	0.01 to 18.0	14 to 16	1.15:1	1.25:1	—	—	No	Not required
NC346B Precision	APC3.5 (M)	0.01 to 18.0	14 to 16	1.15:1	1.25:1	—	—	No	Not required
NC346B Option 1	N (M)	0.01 to 18.0	14 to 16	1.15:1	1.35:1	—	—	No	Not required
NC346B Option 2	APC7	0.01 to 18.0	14 to 16	1.15:1	1.25:1	—	—	No	Not required
NC346B Option 4	N (F)	0.01 to 18.0	14 to 16	1.15:1	1.35:1	—	—	No	Not required
NC346D	SMA (M)	0.01 to 18.0	19 to 25*1	1.50:1	1.50:1	—	—	No	Not required
NC346D Precision	APC3.5 (M)	0.01 to 18.0	19 to 25*1	1.50:1	1.50:1	—	—	No	Not required
NC346D Option 1	N (M)	0.01 to 18.0	19 to 25*1	1.50:1	1.75:1	—	—	No	Not required
NC346D Option 2	APC7	0.01 to 18.0	19 to 25*1	1.50:1	1.50:1	—	—	No	Not required
NC346D Option 3	N (F)	0.01 to 18.0	19 to 25*1	1.50:1	1.75:1	—	—	No	Not required
NC346C	APC3.5 (M)	0.01 to 26.5	13 to 17	1.15:1	1.25:1	1.35:1	—	Yes*3	Required*3
NC346E	APC3.5 (M)	0.01 to 26.5	19 to 25*1	1.50:1	1.50:1	1.50:1	—	Yes*3	Required*3
NC346Ka	K (M)*2	0.10 to 40.0	10 to 17	1.25:1	1.30:1	1.40:1	1.50:1	Yes*3	Required*3

*1: Flatness better than ± 2 dB


*2: Compatible with SMA and APC3.5

*3: When using noise sources output by DC, always use in combination with a DC block.


Specifications outlines of recommended DC Blocks and Adapters

	Ordering		RF Connector	Frequency Range	VSWR
	Model	Name			
DC Block	J0805	DC Block, N type (MODEL 7003)	N (M)-N (F)	10 kHz to 18 GHz	1.35 (max.)
	J1555A	DC Block, SMA type (MODEL 7006-1)	SMA (M)-SMA (F)	9 kHz to 20 GHz	1.50 (9 kHz to 10 kHz), 1.50 (11 kHz to 20 kHz), 1.30 (20 kHz to 20 GHz)
	K261	DC Block	K (M)-K (F)	10 kHz to 40 GHz	See figure (return loss) below
Adapter	J0004	Coaxial Adapter	N (M)-SMA (F)	DC to 12.4 GHz	≤ 1.08 (DC to 3 GHz), ≤ 1.11 (3 GHz to 6 GHz), ≤ 1.18 (6 GHz to 12.4 GHz)
	J1398A	N-SMA Adapter	N (M)-SMA (F)	DC to 26.5 GHz	≤ 1.05 (DC to 3 GHz), ≤ 1.07 (3 GHz to 6 GHz), ≤ 1.2 (6 GHz to 13.5 GHz), ≤ 1.3 (13.5 GHz to 20 GHz), ≤ 1.45 (20 GHz to 26.5 GHz)

DC Block K261 Return Loss

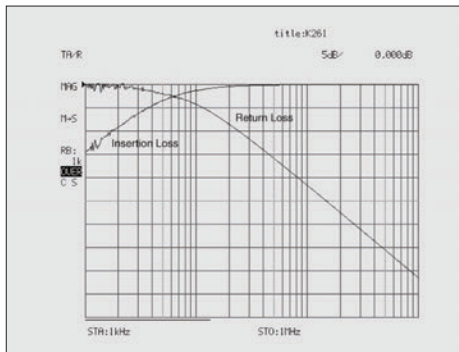

Typical Low Frequency Insertion Loss measured on K261 over the range of 1 kHz to 1 MHz.

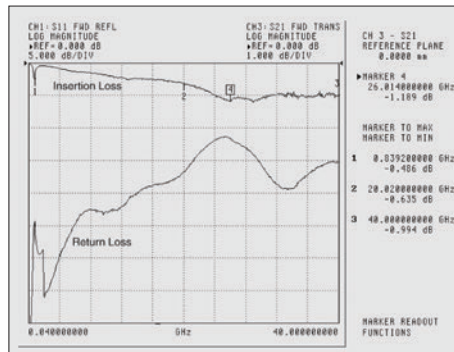

Insertion Loss and Return Loss measured on K261 over the range of 40 MHz to 40 GHz.

Recommended DC blocks/Adaptor combinations for MS2850A/MS2840A/MS2830A/MS269xA series signal analyzer

	Model	Frequency Range	RF connector	Recommended DC Block Order Name	Recommended Adapter Order Name
MS2850A series	MS2850A-047	9 kHz to 32 GHz	K (F)	K261 (from 10 kHz)	Not required
	MS2850A-046	9 kHz to 44.5 GHz	K (F)	K261 (10 kHz to 40 GHz)	Not required
MS2840A series	MS2840A-040	9 kHz to 3.6 GHz	N (F)	Not required	Not required
	MS2840A-041	9 kHz to 6 GHz	N (F)	Not required	Not required
	MS2840A-044	9 kHz to 26.5 GHz	N (F)	J1555A (9 kHz to 20 GHz)	J1398A
	MS2840A-046	9 kHz to 44.5 GHz	K (F)	K261 (10 kHz to 40 GHz)	Not required
MS2830A series	MS2830A-040	9 kHz to 3.6 GHz	N (F)	Not required	Not required
	MS2830A-041	9 kHz to 6 GHz	N (F)	Not required	Not required
	MS2830A-043	9 kHz to 13.5 GHz	N (F)	Not required	Not required
	MS2830A-044	9 kHz to 26.5 GHz	N (F)	J1555A (9 kHz to 20 GHz)	J1398A
	MS2830A-045	9 kHz to 43 GHz	K (F)	K261 (10 kHz to 40 GHz)	Not required
MS269xA series	MS2690A	50 Hz to 6 GHz	N (F)	J1555A (from 9 kHz)	J0004
	MS2691A	50 Hz to 13.5 GHz	N (F)	J1555A (from 9 kHz)	J1398A
	MS2692A	50 Hz to 26.5 GHz	N (F)	J1555A (9 kHz to 20 GHz)	J1398A

USB (B)

USB3.0 compatible

Connector: USB-B Connector (rear panel 1 port)

PCIe

PCIe Gen2 x8 compatible

Connector: PCIe Connector (rear panel 1 port)

CAL port (for future extension)

Not available at present.

Connector: BNC-J (rear panel)

Display

XGA color LCD (Resolution: 1024 × 768)

Size: 8.4" (213 mm diagonal)

Dimensions and mass

Dimensions	426 (W) × 177 (H) × 390 (D)mm (excluding projections)
Mass	≤21 kg (With MS2850A-047 or 046, including all options)

Power supply

Power voltage	100 V(ac) to 120 V(ac) or 200 V(ac) to 240 V(ac)
Frequency	50 Hz to 60 Hz
Power consumption	≤500 VA (including all options) 340 VA (nom.) (With MS2850A-047 or 046, MS2850A-067/068/032/033/034 installed, excluding other options)

Temperature

Operating temperature	0°C to +45°C
Storage temperature	−20°C to +60°C

Environment performance

Conducted emission	Conforms to EN61326-1
Radiated emission	Conforms to EN61326-1
Harmonic current emission	Conforms to EN61000-3-2
Electrostatic discharge	Conforms to EN61326-1
Electromagnetic field immunity	Conforms to EN61326-1
Fast transient/burst	Conforms to EN61326-1
Surge	Conforms to EN61326-1
Conducted RF	Conforms to EN61326-1
Power frequency magnetic field	Conforms to EN61326-1
Voltage dips/short interruption	Conforms to EN61326-1

CE Marking

EMC: 2014/30/EU, EN61326-1, EN61000-3-2
LVD: 2014/35/EU, EN61010-1
RoHS: 2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018

UKCA Marking

EMC: S.I. 2016 No.1091, EN 61326-1, EN61000-3-2
LVD: S.I. 2016 No.1101, EN 61010-1
RoHS: S.I. 2012 No.3032, EN IEC 63000:2018

OS

Orders from September 2020
Windows 10 (64 bits)

Orders before August 2020
Windows 7 (64 bits)

Phase Noise Measurement Function MS2850A-010

Displays the phase noise characteristics on a logarithmic scale

Frequency

Range	10 MHz to Upper frequency limit
Offset Frequency Range	10 Hz to 10 MHz
Marker Mode	Normal, Integral Noise, RMS Noise, Jitter, Residual FM, Off

Secondary Storage Device MS2850A-011

This is removable SSD (Solid State Drive) for user data storage.

This can be installed to Secondary SSD slot on rear panel.

Removable SSD, Win10 MS2850A-014

This is removable SSD (Solid State Drive) contains the same Windows OS (Windows 10) and programs as the factory installed system SSD.

This removable SSD option is used to replace the SSD containing user data installed in the Primary SSD slot at the back panel when performing repair and calibration to prevent risks of user-data leaks when user data must not be taken offsite.

Noise Figure Measurement Function MS2850A-017

Frequency

Frequency setting range

MS2850A-047	10 MHz to 32 GHz
MS2850A-046	10 MHz to 44.5 GHz

Frequency range

MS2850A-047	30 MHz to 32 GHz
MS2850A-046	30 MHz to 40 GHz

NF measurement

Attenuator: 0 dB*

Range	-20 to +40 dB
-------	---------------

*: Recommend to use Pre Amp

ENR	Instrument Uncertainty
4 to 7 dB	±0.02 dB
12 to 17 dB	±0.025 dB
20 to 22 dB	±0.03 dB

Gain measurement

Range	-20 to +40 dB
Instrument Uncertainty	≤0.07 dB

Resolution bandwidth

Setting range: 100 kHz to 8 MHz

Analysis Bandwidth 255 MHz MS2850A-032 (Standard)

Analysis Bandwidth Extension 510 MHz MS2850A-033

Analysis Bandwidth Extension 1 GHz MS2850A-034

Extends the analysis bandwidth to 255 MHz/510 MHz/1 GHz in single analyzer mode by bypassing a preselector and performing fast sampling.

Analysis Bandwidth 255 MHz option is installed by default.

Because an image response is received over 4.2 GHz, it demands an attention for measuring spurious or out-of-analysis-band signals and analyzing signals.

Functions

Model/ Name	MS2850A-032: Analysis Bandwidth 255 MHz
	MS2850A-033: Analysis Bandwidth Extension 510 MHz
	MS2850A-034: Analysis Bandwidth Extension 1 GHz
Bandwidth	Refer to "Bandwidth" of Signal Analyzer.
Sampling rate	Refer to "Sampling rate" of Signal Analyzer.
Capture time (Maximum Capture Time)	Refer to "Maximum Capture time" of Signal Analyzer.
Resolution bandwidth	Refer to "Resolution bandwidth" of Signal Analyzer.
ADC resolution	Refer to "ADC resolution" of Signal Analyzer.

Frequency

Frequency range	Refer to "Performance guarantee frequency range" of Signal Analyzer.
Frequency settings	Refer to "Frequency settings" of Signal Analyzer.

Frequency bands

Frequency bands	Refer to "Frequency bands" of Signal Analyzer /Spectrum Analyzer.
-----------------	---

Amplitude

Display average noise level (DANL)

Refer to "Display average noise level (DANL)" of Signal Analyzer.

In-band frequency characteristics

Refer to "In-band frequency characteristics" of Signal Analyzer.
--

In-band Phase Linearity

Refer to "In-band Phase Linearity" of Signal Analyzer.
--

Image Response

Refer to "Image Response" of Signal Analyzer.

RF frequency characteristics

Refer to "RF frequency characteristics" of Signal Analyzer/Spectrum Analyzer.

Linearity error

Refer to "Linearity error" of Signal Analyzer/Spectrum Analyzer.
--

Noise Floor Reduction MS2850A-051

When measuring signals using the MS2850A, this option estimates the impact of the noise floor of the MS2850A to reduce the estimated impact on the measurement results. The functions of this option can be used only by the spectrum analyzer option.

Noise Floor Reduction

The noise floor reduction amount is specified as the difference between the measured values when the Noise Floor Reduction setting is Off and On.

Moreover, the following conditions are assumed unless otherwise specified.

After performing Noise Floor analysis in the spectrum analyzer mode at a temperature of 18°C to 28°C with Detector = Sample, RBW = 1 MHz, VBW = 1 Hz (Power Average), Input Attenuator = 0 dB, termination = 50Ω, and Preselector Manual Tune = 0 Hz, the in-band power per Hz is measured at each frequency band with Center Frequency = (Center frequency of each frequency band + $\pi \times 1,000,000$) Hz, Span = Bandwidth of each frequency band/10, External Mixer = Off when either the MS2850A-068/168 is installed and Preamplifier = Off, or the MS2850A-068/168 is not installed and Microwave Preselector Bypass = Off.

Frequency Range	Noise Floor Reduction
9 kHz to 4000 MHz	11 dB (nom.)
3500 MHz to 4400 MHz	11 dB (nom.)
4300 MHz to 6000 MHz	11 dB (nom.)
3900 MHz to 8000 MHz	7 dB (nom.)
7900 MHz to 10575 MHz	7 dB (nom.)

Frequency Range	Noise Floor Reduction
10475 MHz to 12200 MHz	7 dB (nom.)
12100 MHz to 18400 MHz	7 dB (nom.)
18300 MHz to 26600 MHz	7 dB (nom.)
26500 MHz to 42100 MHz	7 dB (nom.)
42000 MHz to 44500 MHz	7 dB (nom.)

External Interface for High Speed Data Transfer PCIe MS2850A-053

This interface is connected to an external PC using a standard PCIe cable. With support for a PCIe Gen2 x8 Link, it has a maximum data rate of 4 GB/s between the external controller and PCIe backplane.

External Interface for High Speed Data Transfer USB3.0 MS2850A-054

This interface is connected to an external PC using a standard USB3.0 cable. It has a maximum data rate of 500 MB/s between the external controller and USB3.0 backplane.

Microwave Preselector Bypass MS2850A-067 (Standard)

By bypassing the preselector (image response elimination filter), the RF frequency characteristics and the in-band frequency characteristics are improved, and level accuracy improvement can be achieved.

Because an image response is received due to bypassing the image response elimination filter, this is not adequate for measuring spurious. Low Second Harmonic Distortion MS2850A-076 is recommended if measuring spurious on MS2850A.

Notes on default values:

To improve the in-band frequency characteristics, the default value is set to On for the Signal Analyzer function, and is always set to On for all other applications.

To avoid measuring the image signals generated internally, the default value is set to Off for the Spectrum Analyzer function.

Frequency

Frequency range

Spectrum analyzer, Signal Analyzer (Bandwidth ≤ 31.25 MHz)

MS2850A-047	4 GHz to 32 GHz
MS2850A-046	4 GHz to 44.5 GHz

Signal Analyzer (Bandwidth > 31.25 MHz)

MS2850A-047	4.2 GHz to 32 GHz
MS2850A-046	4.2 GHz to 44.5 GHz

Amplitude

Total level accuracy

Refer to "Total level accuracy" of Spectrum Analyzer
Refer to "Total level accuracy" of Signal Analyzer

RF frequency characteristics

Refer to "RF frequency characteristics" of Signal Analyzer/Spectrum Analyzer.

Display average noise level (DANL)

Refer to "Display average noise level (DANL)" of Spectrum Analyzer
Refer to "Display average noise level (DANL)" of Signal Analyzer

Image Response

With MS2850A-067, Microwave Preselector Bypass: On

To be generated frequency of $1875 \text{ MHz} \times 2$ away

$6 \text{ GHz} < \text{frequency} \leq 13.5 \text{ GHz}$	0 dBc (nom.)
$13.5 \text{ GHz} < \text{frequency} \leq 26.5 \text{ GHz}$	0 dBc (nom.)

Microwave Preamplifier MS2850A-068

This option amplifies signal prior to 1st mixer to enhance sensitivity.

Frequency

Frequency range

MS2850A-047	100 kHz to 32 GHz
MS2850A-046	100 kHz to 44.5 GHz

Amplitude

Measurement range	Refer to "Level measurement range" of Signal Analyzer/Spectrum Analyzer
Maximum input level	Refer to "Maximum input level" of Signal Analyzer/Spectrum Analyzer
Displayed average noise level (Signal Analyzer)	Refer to "Displayed average noise level (DANL)" of Signal Analyzer
Displayed average noise level (Spectrum analyzer)	Refer to "Display average noise level (DANL)" of Spectrum Analyzer
RF frequency characteristics	Refer to "RF Frequency Characteristics" of Signal Analyzer/Spectrum Analyzer
Input attenuator switching error	Refer to "Input attenuator switching uncertainty" of Signal Analyzer/Spectrum Analyzer
Linearity error	Refer to "Linearity error" of Signal Analyzer/Spectrum Analyzer
Secondary harmonic wave distortion	Refer to "Second harmonic distortion" of Signal Analyzer/Spectrum Analyzer
1 dB gain compression	Refer to "1 dB gain compression" of Signal Analyzer/Spectrum Analyzer
Two-tone third-order intermodulation distortion	Refer to "2-tone 3rd-order intermodulation distortion" of Spectrum Analyzer

Extended Specifications MS2850A-072

This option specifies the following items.

- Frequency response in a certain 100 MHz range within bandwidth
- Phase linearity in a certain 100 MHz range within bandwidth
- RF input VSWR

Frequency response in a certain 100 MHz range within bandwidth

Conditions: 18°C to 28°C, ≥ 100 MHz bandwidth, Preamplifier turned off, input attenuator = 10 dB, Reference Level ≤ 0 dBm, Signal Analyzer mode after the completion of calibration.

In the range of ± 50 MHz,

on the basis of the level of a certain frequency [Hz] within $[-(\text{bandwidth} - 100 \text{ MHz})/2, +(\text{bandwidth} - 100 \text{ MHz})/2]$

Frequency Range	Frequency response in a certain 100 MHz range within bandwidth
420 MHz $\leq$ Center Frequency < 4.2 GHz	± 1.6 dB
4.2 GHz $\leq$ Center Frequency ≤ 13.6 GHz	± 1.2 dB
13.6 GHz $<$ Center Frequency ≤ 26.5 GHz	± 1.4 dB
26.5 GHz $<$ Center Frequency ≤ 30 GHz	± 1.6 dB
30 GHz $<$ Center Frequency ≤ 39.5 GHz	± 1.9 dB

Phase linearity in a certain 100 MHz range within bandwidth

Conditions: ≥ 100 MHz bandwidth, Preamplifier turned off, input attenuator = 10 dB, Reference Level ≤ 0 dBm, Signal Analyzer mode after the completion of calibration.

As a deviation from phase linearity in the range of ± 50 MHz,

comparing to a certain frequency [Hz] within $[-(\text{bandwidth} - 100 \text{ MHz})/2, +(\text{bandwidth} - 100 \text{ MHz})/2]$

Frequency Range	Phase linearity in a certain 100 MHz range within bandwidth
420 MHz $\leq$ Center Frequency ≤ 1.24 GHz	± 3.1 degrees*
1.24 GHz $<$ Center Frequency < 4.2 GHz	± 3.1 degrees*
4.2 GHz $\leq$ Center Frequency ≤ 5.14 GHz	± 3.5 degrees*
5.14 GHz $<$ Center Frequency ≤ 26.4 GHz	± 2.7 degrees*
26.4 GHz $<$ Center Frequency ≤ 35 GHz	± 2.4 degrees*
35 GHz $<$ Center Frequency ≤ 42.1 GHz	± 2.6 degrees*
42.1 GHz $<$ Center Frequency ≤ 44.5 GHz	± 3.4 degrees*

*: Release acceptance criteria:

The criteria at the time of factory shipment. Determined with a certain degree within 18°C to 28°C by excluding measurement uncertainty.

RF input

Front panel, K-J, 50 Ω

VSWR: Input attenuator ≥ 10 dB, 18°C to 28°C

40 MHz $\leq$ frequency ≤ 3 GHz	≤ 1.3
3 GHz $<$ frequency ≤ 6 GHz	≤ 1.4
6 GHz $<$ frequency ≤ 13.6 GHz	≤ 1.6
13.6 GHz $<$ frequency ≤ 26.5 GHz	≤ 1.9
26.5 GHz $<$ frequency ≤ 40 GHz	≤ 2.0

Low Second Harmonic Distortion MS2850A-076

This option improves DANL and second harmonic distortion over 4 GHz when Preamp is Off and Microwave Preselector Bypass is Off.

Frequency

Frequency range

Spectrum analyzer, Signal Analyzer (Bandwidth ≤ 31.25 MHz)

MS2850A-047	4 GHz to 32 GHz
MS2850A-046	4 GHz to 44.5 GHz

Signal Analyzer (Bandwidth > 31.25 MHz)

MS2850A-047	4.2 GHz to 32 GHz
MS2850A-046	4.2 GHz to 44.5 GHz

Amplitude

Level measurement range	Refer to "Level measurement range" of Signal Analyzer/Spectrum Analyzer
Maximum input level	Refer to "Maximum input level" of Signal Analyzer/Spectrum Analyzer
Displayed average noise level (Signal Analyzer)	Refer to "Displayed average noise level (DANL)" of Signal Analyzer
Displayed average noise level (Spectrum analyzer)	Refer to "Display average noise level (DANL)" of Spectrum Analyzer
RF frequency characteristics	Refer to "RF Frequency Characteristics" of Signal Analyzer/Spectrum Analyzer
Input attenuator switching error	Refer to "Input attenuator switching uncertainty" of Signal Analyzer/Spectrum Analyzer
Linearity error	Refer to "Linearity error" of Signal Analyzer/Spectrum Analyzer
Secondary harmonic wave distortion	Refer to "Second harmonic distortion" of Signal Analyzer/Spectrum Analyzer
1 dB gain compression	Refer to "1 dB gain compression" of Signal Analyzer/Spectrum Analyzer
Two-tone third-order intermodulation distortion	Refer to "2-tone 3rd-order intermodulation distortion" of Spectrum Analyzer



Specifications are subject to change without notice.

- **United States**

Anritsu Americas Sales Company

450 Century Parkway, Suite 190, Allen, TX 75013 U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

- **Canada**

Anritsu Electronics Ltd.

700-100 Queen Street
Ottawa, Ontario K1P 1J9, Canada
Phone: +1-800-Anritsu (1-800-267-4878)

- **Brazil**

Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

- **Mexico**

Anritsu Company, S.A. de C.V.

Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

- **United Kingdom**

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

- **France**

Anritsu S.A.

12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

- **Germany**

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

- **Italy**

Anritsu S.r.l.

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

- **Sweden**

Anritsu AB

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

- **Finland**

Anritsu AB

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

- **Denmark**

Anritsu A/S

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

- **Russia**

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor., Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

- **Spain**

Anritsu EMEA Ltd.

Representation Office in Spain

Paseo de la Castellana, 141. Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

- **Austria**

Anritsu EMEA GmbH

Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

- **United Arab Emirates**

Anritsu EMEA Ltd.

Anritsu A/S

Office No. 164, Building 17, Dubai Internet City
P. O. Box - 501901, Dubai, United Arab Emirates
Phone: +971-4-3758479

- **India**

Anritsu India Private Limited

6th Floor, Indique ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

- **Singapore**

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House, Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

- **Vietnam**

Anritsu Company Limited

16th Floor, Peakview Tower, 36 Hoang Cau Street, O Cho Dua Ward,
Dong Da District, Hanoi, Vietnam
Phone: +84-24-3201-2730

- **P.R. China (Shanghai)**

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A, New Caohejing International
Business Center No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

- **P.R. China (Hong Kong)**

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

- **Japan**

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

- **Korea**

Anritsu Corporation, Ltd.

5FL, 235 Pangyocho-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

- **Australia**

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road, Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

- **Taiwan**

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817