

---

# PXle-4113 Specifications

---

2023-08-21



# Contents

PXIe-4113 Specifications..... 3

# PXIe-4113 Specifications

## PXIe-4113 Specifications

These specifications apply to the PXIe-4113.

### Definitions

**Warranted** specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

**Characteristics** describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Warranted** unless otherwise noted.

### Conditions

Specifications are valid under the following conditions unless otherwise noted.

- Ambient temperature<sup>1</sup> of 23 °C ± 5 °C
- Calibration interval of 2 years
- 30 minutes warm-up time
- niDCPower Power Line Frequency property or NIDCPOWER\_ATTR\_POWER\_LINE\_FREQUENCY attribute set to 1 power line cycle (PLC)

<sup>1</sup> The ambient temperature of a PXI system is defined as the temperature at the chassis fan inlet (air intake).

- niDCPower Samples to Average property or NIDCPOWER\_ATTR\_SAMPLES\_TO\_AVERAGE attribute set to 300 for optimal 50 Hz and 60 Hz rejection
- If the PXI Express chassis has multiple fan speed settings, fans set to the highest setting

## Cleaning the Module

Clean devices and terminal blocks by brushing off light dust with a soft, nonmetallic brush. Remove other contaminants with a soft, lint-free, dampened cloth. Do not use detergent or chemical solvents. The unit must be completely dry and free from contaminants before returning to service.


## Device Capabilities

The PXIe-4113 is a single-quadrant power supply with two output channels that are capable of identical output. Channels are isolated from each other and from chassis ground.

<b>DC voltage</b>	
Voltage range	10 V
Minimum programmable voltage level/limit	0.03 V
<b>DC current</b>	
Current range	6 A
Minimum programmable current level/limit	0.02 A
Output power	60 W/channel

The following figure illustrates the voltage and the current source capabilities of the PXIe-4113.

Figure 1. PXIe-4113 Quadrant Diagram

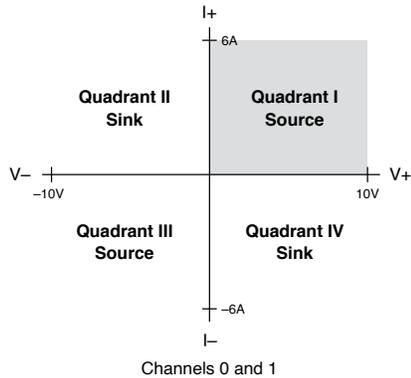

## Programming and Measurement Accuracy/Resolution

Table 1. Programming and Measurement Accuracy/Resolution

Specification	Resolution	Accuracy $\pm$ (% of output + offset), $T_{cal} \pm 5^\circ\text{C}$	Temperature Coefficient/ $^\circ\text{C}$ , outside $T_{cal} \pm 5^\circ\text{C}$
Voltage programming	0.32 mV	0.1% + 15 mV	0.004% + 0.1 mV
Voltage measurement	3 mV	0.1% + 15 mV	0.004% + 0.25 mV
Current programming	0.19 mA	0.15% + 20 mA <sup>2</sup>	0.015% + 0.14 mA
Current measurement	2 mA	0.15% + 20 mA	0.015% + 0.21 mA

$T_{cal}$  is the internal device temperature recorded by the PXIe-4113 at the completion of the last self-calibration.

Based on 16-bit DAC after calibration.

Based on 14-bit ADC with sign bit after calibration.

## Load Regulation

Voltage (per amp of output load)	0.5 mV
----------------------------------	--------

<sup>2</sup>  $T_{cal}$  is the internal device temperature recorded by the PXIe-4113 at the completion of the last external calibration.

Current (per volt of output change)	0.25 mA
-------------------------------------	---------



**Note** Voltage load regulation is measured at the output channel terminals with the device configured for local sense.

## Voltage Output Speed

<b>Rise time (measured from 10% to 90% of programmed voltage change from 0.03 V to 10 V with specified load)</b>	
Full resistive load (1.67 $\Omega$ ).	<10 ms, typical
No load	<10 ms, typical
<b>Fall time (measured from 90% to 10% of programmed voltage change from 10 V to 0.03 V with specified load)</b>	
Full resistive load (1.67 $\Omega$ )	<10 ms, typical
No load	<10 ms, typical

## Transient Response and Settling Time

Transient response	<200 $\mu$ s to recover within 100 mV of voltage level after a load current change from 50% to 100% of current range, typical
<b>Settling time</b>	
<b>Rise time (time to settle within 0.1% of final programmed voltage level from 0.03 V to 10 V with specified load)</b>	
Full resistive load (1.67 $\Omega$ )	25 ms, typical
No load	25 ms, typical

**Fall time (time to settle within 0.1% of final programmed voltage level from 10 V to 0.03 V with specified load)**

Full resistive load (1.67 $\Omega$ )	25 ms, typical
No load	25 ms, typical

## Ripple and Noise

<b>Voltage<sup>3</sup></b>	
Peak-to-peak	<18 mV, typical
RMS	<3 mV, typical
Current, RMS <sup>4</sup>	<2 mA, typical

## Auxiliary Power Input Line Regulation

<b>Line regulation (per volt of change in the auxiliary power input)</b>	
Voltage	0.2 mV
Current	0.5 mA

## Remote Sense

Maximum output lead drop	Up to 1 V drop per lead
Maximum sense lead resistance	Up to 1 $\Omega$ per lead

<sup>3</sup> Noise is measured from 20 Hz to 20 MHz at output voltages of 0.2 V to 10 V.

<sup>4</sup> Noise bandwidth is limited to 10 kHz, and is measured at 20 mA into a 500  $\Omega$  load.

## Protection

<b>Output channel protection</b>	
Overcurrent or reverse voltage	Reverse clamp diode, protected by thermal overload circuit
Overtemperature	Automatic shutdown
<b>Auxiliary power input protection</b>	
Overvoltage, typical	>52.8 VDC shut-off
Overcurrent or reverse voltage	Fused

## Absolute Maximum Limit



**Note** Applying levels beyond the ratings specified in this section can result in permanent damage to the device.



**Note** Connect only voltages that are within these limits.

Voltage from auxiliary power + to earth ground	60 VDC
Voltage from auxiliary power - to earth ground	1 VDC

## Isolation

<b>Isolation voltage, channels 0- and 1-to-earth ground<sup>5</sup></b>	
Continuous	150 VDC, CAT I

<sup>5</sup> Verified with a 5-second dielectric withstand test.

Withstand	800 V <sub>pk</sub>
-----------	---------------------



**Caution** Do not connect to MAINS. Do not connect to signals or use for the measurements within CAT II, III, or IV.



**Note** Measurement Categories CAT I and CAT O (Other) are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

**Hazardous Voltage** Take precautions to avoid electrical shock when operating this product at hazardous voltages.



**Note** Isolation voltage ratings apply to the voltage measured between any channel pin and the chassis ground pins of the front panel. When operating channels in series or floating on top of external voltage references, ensure that no terminal exceeds this rating.

## Power Requirement

PXI power requirement	0.5 A from 3.3 V rail, 0.25 A from 12 V rail
Auxiliary power source input requirements	45.6 VDC to 50.4 VDC, 3.5 A max

## Measurement Timing Characteristics

Measurement rate	
Default	60/s (Line frequency set to 60 Hz, aperture set to 1 PLC, measure record mode), nominal

Maximum	5,250/s, nominal
---------	------------------

## Triggers

### Input Triggers

Types	Start Source Sequence Advance Measure
<b>Sources (PXI trigger lines 0 to 7)<sup>6</sup></b>	
Polarity	Active high (not configurable)
Minimum pulse width	100 ns
<b>Destinations<sup>7</sup> (PXI trigger lines 0 to 7)</b>	
Polarity	Active high (not configurable)
Minimum pulse width	200 ns

### Output Triggers (Events)

Types	Source Complete Sequence Iteration Complete
-------	--

<sup>6</sup> Pulse widths and logic levels are compliant with **PXI Express Hardware Specification Revision 1.0 ECN 1**.

<sup>7</sup> Input triggers can come from any source (PXI trigger or software trigger) and be exported to any PXI trigger line. This allows for easier multi-board synchronization regardless of the trigger source.

	Sequence Engine Done
	Measure Complete
<b>Destinations (PXI trigger lines 0 to 7)</b>	
Polarity	Active high (not configurable)
Pulse width	230 ns

## Physical Characteristics

Dimensions	3U, one-slot, PXI Express/cPCI Express module; 2.0 cm × 13.0 cm × 21.6 cm (0.8 in. × 5.1 in. × 8.5 in.), nominal
Weight	443 g, nominal
User-replaceable fuse, auxiliary power input (PCB-mount)	F 6.3 A H 250 V (5 × 20 mm ceramic fuse)



**Note** NI recommends the Littelfuse 021606.3MXP fuse.

### Front panel connectors

Output channels	Phoenix Contact, 5.08 mm (10 position)
Auxiliary power input	Weidmuller, 3.5 mm (2 × 2 position)



**Note** I/O connectors can accept wire gauges from 12 AWG to 24 AWG. NI recommends 14 AWG or smaller.



**Note** The PXIe-4113 ships with four sense jumpers installed on the output connector. The sense jumpers connect the sense terminals to their respective output terminals.

## Calibration Interval

Recommended calibration interval	2 years
----------------------------------	---------

## Environment

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
Pollution Degree	2

Indoor use only.

### Operating Environment

Ambient temperature range	0 °C to 40 °C
Relative humidity range	10% to 90%, noncondensing

### Storage Environment

Ambient temperature range	-40 °C to 70 °C
Relative humidity range	5% to 95%, noncondensing

## Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse
<b>Random vibration</b>	
Operating	5 Hz to 500 Hz, 0.3 g RMS
Nonoperating	5 Hz to 500 Hz, 2.4 g RMS

## Compliance and Certifications



**Caution** You can impair the protection provided by the PXle-4113 if you use it in a manner not described in this document.



**Caution** The auxiliary power input port is sensitive to electrostatic discharge (ESD). When subjected to ESD during normal operation, a fault might result that requires user intervention to recover to normal operation. To ensure proper operation, make all I/O connections before attempting to use the device. In addition, take care to prevent ESD to the auxiliary power input port during normal operation.

### Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



**Note** For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

## Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations, certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

## Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit [ni.com/product-certifications](https://ni.com/product-certifications), search by model number, and click the appropriate link.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the **Engineering a Healthy Planet** web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](https://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）

-  **中国 RoHS**— NI 符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于 NI 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china).)