
VRTS Specifications

2023-08-04



Contents

| | |
|---|----|
| VRTS Specifications..... | 3 |
| Definitions..... | 3 |
| Conditions..... | 4 |
| mmRH-5591/5592 RF Characteristics..... | 4 |
| Alignment Laser Specifications (Only applies to mmRH-5591)..... | 5 |
| Object Simulation..... | 7 |
| Measurements with the PXle-5841..... | 9 |
| Connector Descriptions..... | 9 |
| mmRH-5591/5592 Connectors..... | 9 |
| PXle-5551 Connectors..... | 11 |
| Environmental Characteristics..... | 13 |
| Physical Characteristics..... | 13 |

VRTS Specifications

These specifications apply to simulation and measurement using the VRTS.

The Vehicle Radar Test System (VRTS) Bandwidth comprises the following modules:

- PXIe-5551 Variable Delay Generator
- mmRH-5591 Bistatic mmWave Radio Head
- mmRH-5592 Monostatic mmWave Radio Head
- PXIe-5841 Vector Signal Transceiver (optional)
- PXI Express Chassis
- PXI Express Controller

In this document, the term **system** describes the above modules assembled as described in the VRTS Getting Started Guide. There is no single system component labeled “VRTS”.



Note Reference the specifications document for your PXIe-5841, PXI Express Chassis, and PXI Express Controller for more information on these components of the VRTS.

© 2020–2023 National Instruments Corporation. All rights reserved. Refer to the <National Instruments>_Legal Information directory for information about NI copyright, patents, trademarks, warranties, product warnings, and export compliance.

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty. Warranted specifications account for measurement uncertainties, temperature drift, and aging. Warranted specifications are ensured by design or verified during production and calibration.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Typical-95** specifications describe the performance met by 95% ($\approx 2\sigma$) of models with a 95% confidence.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.
- **Measured** specifications describe the measured performance of a representative model.

Specifications are **Typical** unless otherwise noted.

Conditions

Warranted specifications are valid under the following conditions unless otherwise noted.

For all configurations:

- 30 minutes warm-up time
- Calibration cycle is maintained
- The chassis fan mode is set to Auto when used in a chassis with ≥ 58 W slot-cooling capability or the fan mode is set to High when used in any other chassis
- Empty chassis slots contain slot blockers and EMC filler panels to minimize temperature drift and reduce emissions
- Modules are connected with cables of the appropriate length:
 - 0.15 m cables to connect PXle-5551 modules to other PXle-5551
 - 0.15 m cables to connect PXle-5551 modules to PXle-5841 modules
 - 0.46 m cables to connect mmRH-5591 or mmRH-5592 devices to PXle-5551 modules

Typical specifications do not include measurement uncertainty. For measurement applications, typical specifications are measured immediately after a PXle-5841 self-calibration is performed.

The following specifications apply to configurations with 1 to 2 objects per radio head. The system is capable of simulating up to 4 objects per radio head.

mmRH-5591/5592 RF Characteristics

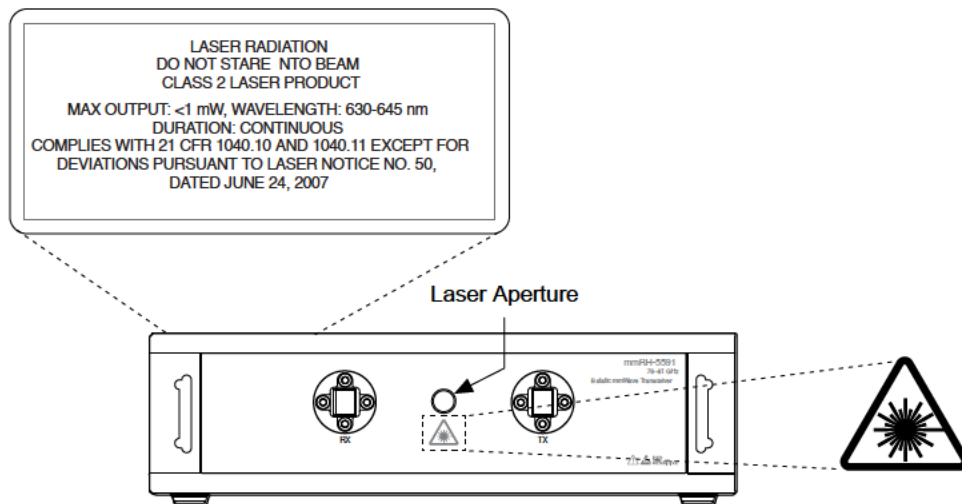
| RX | |
|---|--|
| Connector | WR-12, UG387/U, horizontal polarization (mmRH-5591) WR-12, UG387/U, vertical polarization (mmRH-5592) |
| Recommended maximum input power (at the waveguide flange) | -13 dBm |
| Absolute maximum input power (at the waveguide flange) | +10 dBm, nominal |
| VSWR (75 GHz to 81 GHz, at the waveguide flange) | 2:1, nominal |
| TX | |
| Connector | WR-12, UG387/U, horizontal polarization (mmRH-5591) WR-12, UG387/U, vertical polarization (mmRH-5592) |
| Maximum Tx output power (at the waveguide flange) | +7 dBm, nominal |
| Tx to Rx antenna isolation | ≥80 dB, measured (mmRH-5591) 20 dB, measured (mmRH-5592) |

Alignment Laser Specifications (Only applies to mmRH-5591)

| | |
|-----------------|------------------|
| Laser class | 2 |
| Wavelength | 630 nm to 645 nm |
| Beam divergence | 0.15 mrad |
| Duration | Continuous |
| Maximum power | < 1 mW |



Caution This is a Class 2 (Class II) laser product and has visible laser radiation up to 1 mW emitting from the laser aperture. This product is for use as an alignment laser only, per CFR Title 21, Chapter I, Subchapter J, Part 1040.11(b). The product is safe for momentary exposures but can be hazardous for deliberate staring into the beam. **DO NOT STARE INTO THE BEAM.** Class 2 lasers can cause photochemical and thermal retinal injury to the eye, as well as skin reactions and burns with longer than momentary exposure. Adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure. Dazzle, flash-blindness and afterimages may be caused by a beam from a Class 2 laser product, particularly under low ambient light conditions. This may have indirect general safety implications resulting from temporary disturbance of vision or from startle reactions. Such visual disturbances could be of particular concern connected with performing safety-critical operations such as working with machines or at height, with high voltages, or driving. Users are instructed not to stare into the beam, and should perform active protective reactions by moving the head or closing the eyes and to avoid continued intentional intrabeam viewing.



Object Simulation

| | |
|-------------------------|--------------------------|
| Number of objects | 1 to 4 per radio head |
| Instantaneous bandwidth | 4 GHz |
| Frequency bands | |
| Band 1 | 76 GHz to 80 GHz |

| | |
|--------|------------------|
| Band 2 | 77 GHz to 81 GHz |
|--------|------------------|

Table 1. Additive Phase Noise, 79 GHz at 100 kHz Offset, Measured

| Distance (m) | Phase Noise (dBc/Hz) |
|---|--|
| 3 | -95 |
| 50 | -95 |
| 100 | -92 |
| 150 | -90 |
| 200 | -88 |
| 250 | -86 |
| 300 | -85 |
| Setup distance | 0.7 m to 3.0 m |
| Distance | |
| Shortest simulated distance | 2.5 m + setup distance (mmRH-5591) 2.6 m + setup distance (mmRH-5592) |
| Longest simulated distance | 300 m |
| Distance resolution | 5 cm, nominal |
| Distance accuracy (at the waveguide flange, 18 °C to 28 °C) | |
| Distances ≤100 m | ±4 cm, typical |
| Distances >100 m | ±7 cm, typical |
| Distance temperature drift (at the waveguide flange, 23 °C ± 5 °C) | |
| Distances ≤100 m | ±1 cm, measured |
| Distances >100 m | ±2 cm, measured |
| Radar cross section (RCS) (at the waveguide flange) | |
| RCS range | 127 dB (-41 dBsm to 86 dBsm), nominal (mmRH-5591) 142.67 dB (-87 dBsm to 55 dBsm), nominal (mmRH-5592) |
| Maximum RCS gain | 18 dB, nominal (mmRH-5591) 18 dB, nominal (High-gain mode) (mmRH-5592) |

| | |
|---------------------------|---|
| | 3 dB, nominal (Low-gain mode) (mmRH-5592) |
| RCS dynamic range | 50 dB |
| RCS resolution | 0.25 dB, nominal |
| RCS accuracy | ± 2 dB, typical, 18 °C to 28 °C |
| RCS temperature drift | ± 1 dB, measured, 23 °C \pm 5 °C |
| Doppler | |
| Doppler range | 0 to ± 500 km/hr (75 kHz), nominal |
| Doppler resolution | 0.1 km/hr (15 Hz), nominal |
| Doppler accuracy | ± 0.05 km/hr (7.5 Hz), nominal |
| Object update rate | |
| Update rate | 5 ms/simulated object |

Measurements with the PXIe-5841

| | |
|---|--|
| Frequency bands | |
| Band 0 | 75 GHz to 79 GHz |
| Band 1 | 76 GHz to 80 GHz |
| Band 2 | 77 GHz to 81 GHz |
| Band 3 | 78 GHz to 82 GHz |
| Absolute power measurement accuracy (at the waveguide flange) | ± 1.5 dB, typical, 18 °C to 28 °C |
| Power measurement temperature drift (at the waveguide flange) | ± 0.5 dB, measured, 23 °C \pm 5 °C |

mmRH-5591/5592 Connectors

| | |
|-----------|---|
| RX | |
| Connector | WR-12, UG387/U, horizontal polarization (mmRH-5591) |

| | |
|---|--|
| | WR-12, UG387/U, vertical polarization (mmRH-5592) |
| Recommended maximum input power (at the waveguide flange) | -13 dBm |
| Absolute maximum input power (at the waveguide flange) | +10 dBm, nominal |
| VSWR (75 GHz to 81 GHz, at the waveguide flange) | 2:1, nominal |
| TX | |
| Connector | WR-12, UG387/U, horizontal polarization (mmRH-5591) WR-12, UG387/U, vertical polarization (mmRH-5592) |
| Maximum Tx output power (at the waveguide flange) | +7 dBm, nominal |
| RX IF2 OUT | |
| Connector | SMA (female) |
| RX IF1 OUT | |
| Connector | SMA (female) |
| TX IF1 IN | |
| Connector | SMA (female) |
| Input impedance | 50 Ω , nominal |
| Recommended maximum input power | -3 dBm |
| Absolute maximum input power | +10 dBm, nominal |
| TX IF2 IN | |
| Connector | SMA (female) |
| Input impedance | 50 Ω , nominal |
| Recommended maximum input power | -3 dBm |
| Absolute maximum input power | +10 dBm, nominal |

| | |
|---|---|
| Gain from mmRH-5591 TX IF2 IN to mmRH-5591 TX (at the waveguide flange) | +10 dB, nominal (mmRH-5591) +10 dB, nominal (High-gain mode) (mmRH-5592) -5 dB, nominal (Low-gain mode) (mmRH-5592) |
| Frequency range | 1.8 GHz to 5.8 GHz |
| 10 MHz REF IN | |
| Connector | SMA (female) |
| Input impedance | 50 Ω , nominal |
| Recommended input power | 0 dBm to +10 dBm, nominal |
| Absolute maximum input power | +15 dBm, nominal |
| Frequency | 10 MHz |
| Tolerance | $\pm 10 \times 10$ |
| 10 MHz REF OUT | |
| Connector | SMA (female) |
| Frequency | 10 MHz, nominal |
| Output power | +7dBm, nominal |
| 12 V 3.0 A MAX | |
| Connector | Two-pin custom |
| DIO | |
| Connector | Mini HDMI |

PXle-5551 Connectors

| | |
|------------------------------|----------------------------|
| REF IN | |
| Connector | MMPX (female) |
| Input impedance | 50 Ω , nominal |
| Recommended input power | +0 dBm to +10 dBm, nominal |
| Absolute maximum input power | +15 dBm, nominal |

| | |
|--|-----------------------|
| Frequency | 10 MHz |
| Tolerance | $\pm 10 \times 10$ |
| REF OUT | |
| Connector | MMPX (female) |
| Frequency | 10 MHz, nominal |
| Amplitude | +10 dBm, nominal |
| RX IF2 IN | |
| Connector | SMA (female) |
| Input impedance | 50 Ω , nominal |
| Recommended maximum input power | -3 dBm |
| Absolute maximum input power | +10 dBm, nominal |
| RX IF2 OUT | |
| Connector | SMA (female) |
| Gain from mmRH-5591 RX (at the waveguide flange) to PXIe-5551 RX IF2 OUT | +10 dB, nominal |
| Frequency range | 1.8 GHz to 5.8 GHz |
| TX IF1 IN | |
| Connector | SMA (female) |
| Input impedance | 50 Ω , nominal |
| Recommended maximum input power | -3 dBm |
| Absolute maximum input power | +13 dBm, nominal |
| TX IF1 OUT | |
| Connector | SMA (female) |
| DIO | |
| Connector | Mini HDMI |
| PFI 0 | |
| Connector | SMA (female) |

| | |
|--------------|--------------|
| PFI 1 | |
| Connector | SMA (female) |

Environmental Characteristics

Temperature and Humidity

The following specifications apply to the mmRH-5591, mmRH-5592, and PXIe-5551. Refer to individual product specifications for other system components.

| | |
|--|---------------------------|
| Temperature | |
| Operating with PXIe-5841 | |
| Chassis with slot cooling capacity ≥ 58 W | 0 °C to 55 °C |
| All other compatible chassis | 0 °C to 40 °C |
| Operating without PXIe-5841 | 0 °C to 55 °C |
| Storage | -40 °C to 71 °C |
| Humidity | |
| Operating | 10% to 90%, noncondensing |
| Storage | 5% to 95%, noncondensing |
| Pollution Degree | 2 |
| Maximum altitude | 2,000 m |

Shock and Vibration

| | |
|-------------------------|------------------------------|
| Random vibration | |
| Operating | 5 Hz to 500 Hz, 0.3 g RMS |
| Non-operating | 5 Hz to 500 Hz, 2.4 g RMS |
| Shock | |
| Operating | 30 g, half-sine, 11 ms pulse |
| Non-operating | 50 g, half-sine, 11 ms pulse |

Physical Characteristics

Table 2. VRTS with 4 GHz Bandwidth Physical Characteristics, Nominal

| Module | Dimensions | Weight (kg) |
|-----------|----------------------------|-------------|
| mmRH-5591 | 21.9 cm × 15.5 cm × 5.7 cm | 0.9 |
| mmRH-5592 | 21.9 cm × 15.5 cm × 5.7 cm | 0.9 |
| PXle-5551 | 2 slots | 1.1 |

Figure 1. mmRH-5591 Mechanical Dimensions, Top View

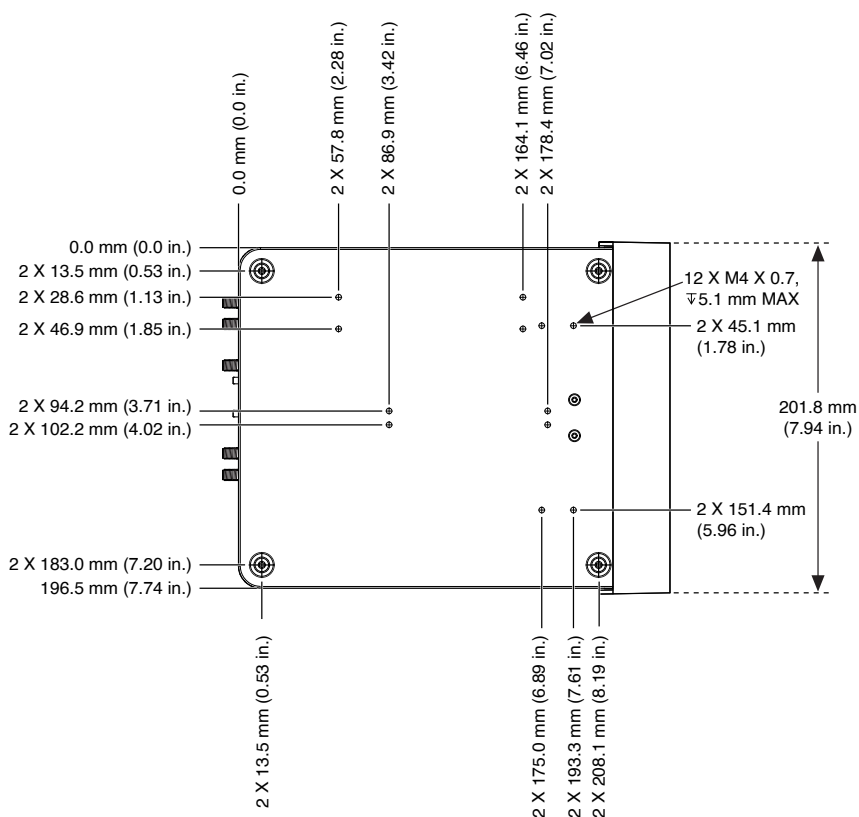


Figure 2. mmRH-5591 Mechanical Dimensions, Bottom View

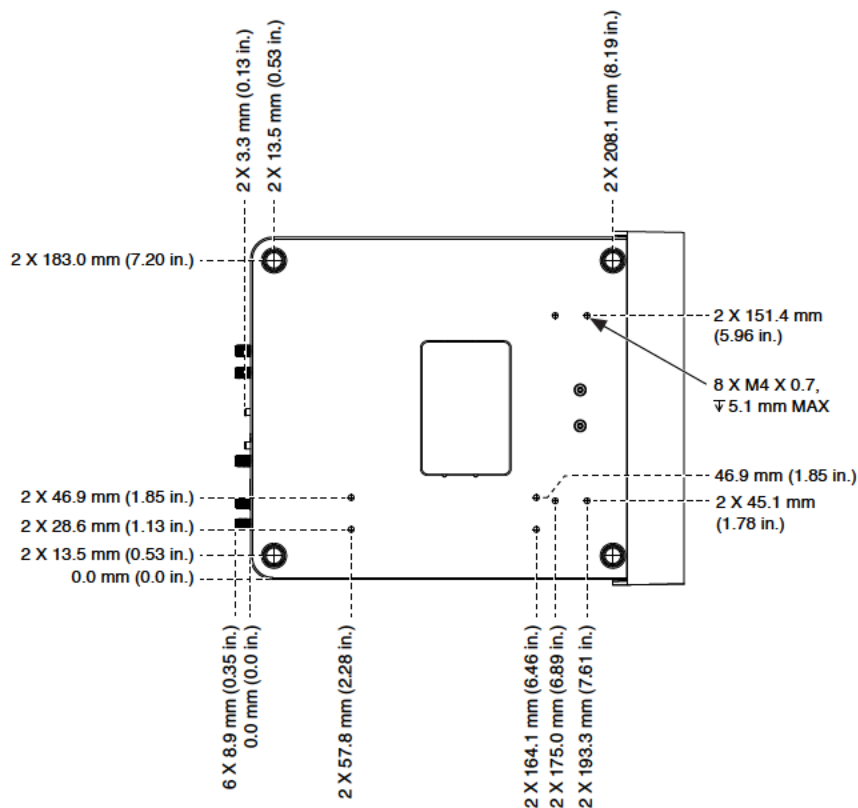


Figure 3. mmRH-5591 Laser Tolerance, Side View

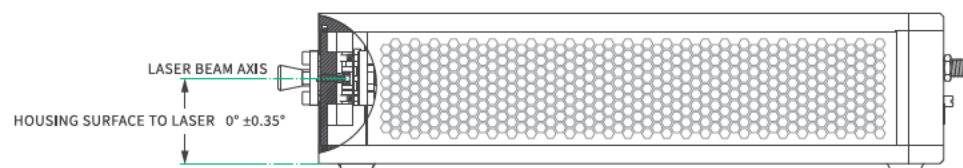


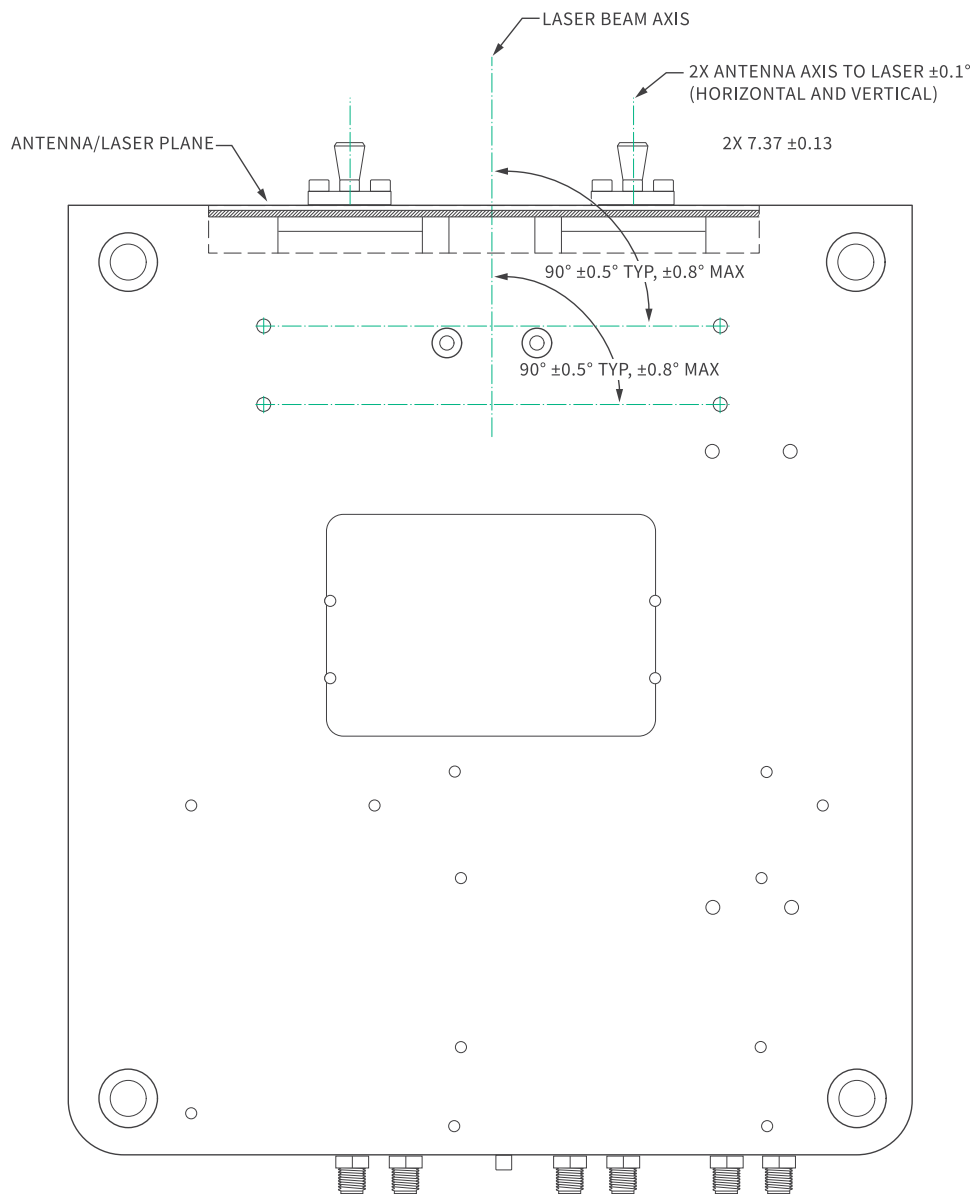
Figure 4. mmRH-5591 Laser Tolerance, Bottom View

Figure 5. mmRH-5591 Mechanical Dimensions, Front View

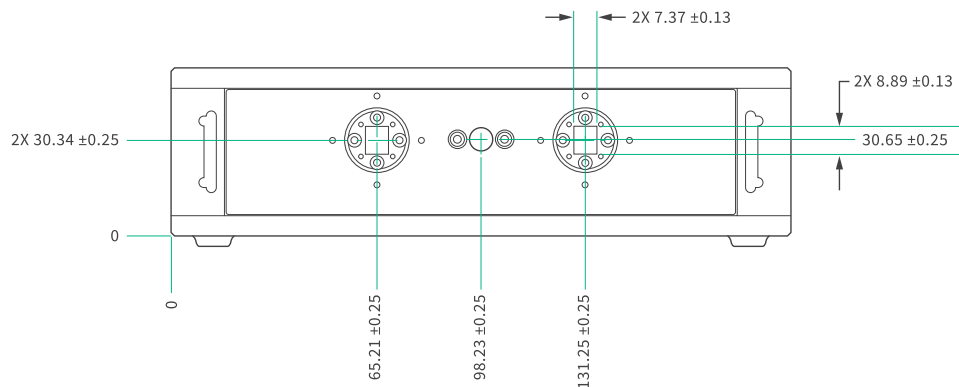


Figure 6. mmRH-5592 Mechanical Dimensions, Front View

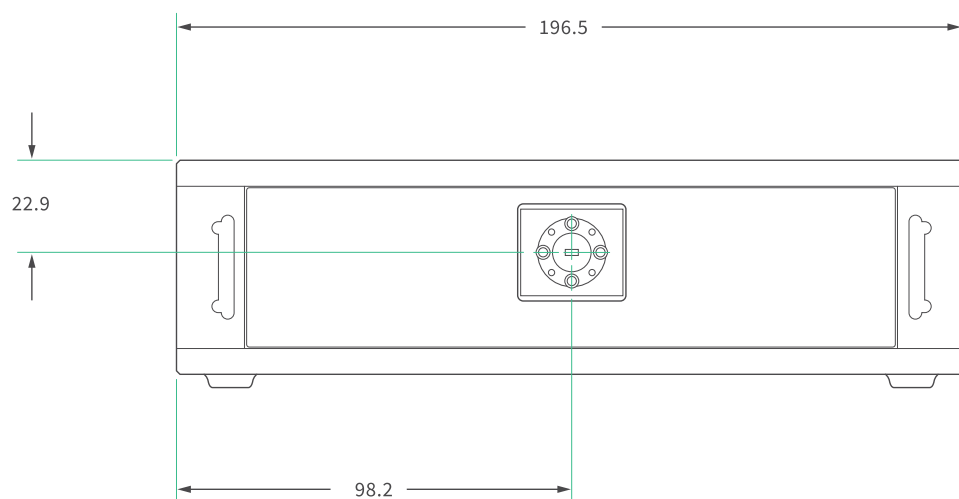


Figure 7. mmRH-5591/5592 Mechanical Dimensions, Rear View

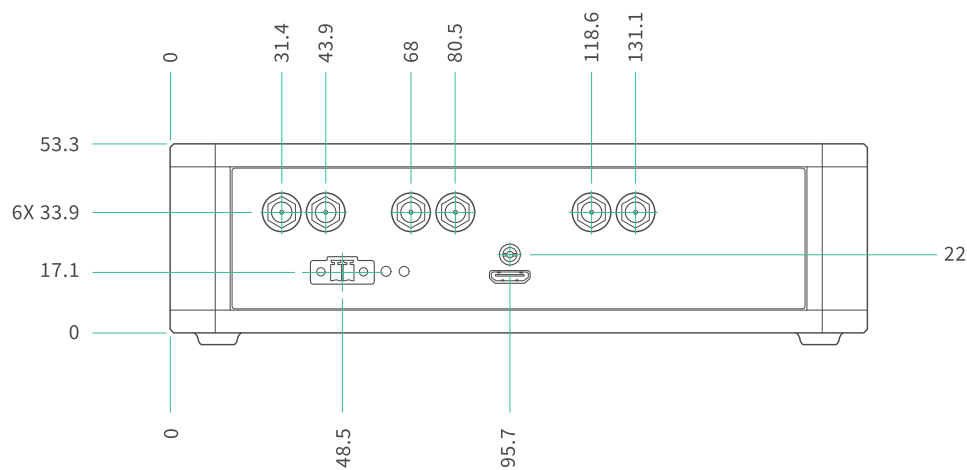


Figure 8. mmRH-5592 Mechanical Dimensions, Top View

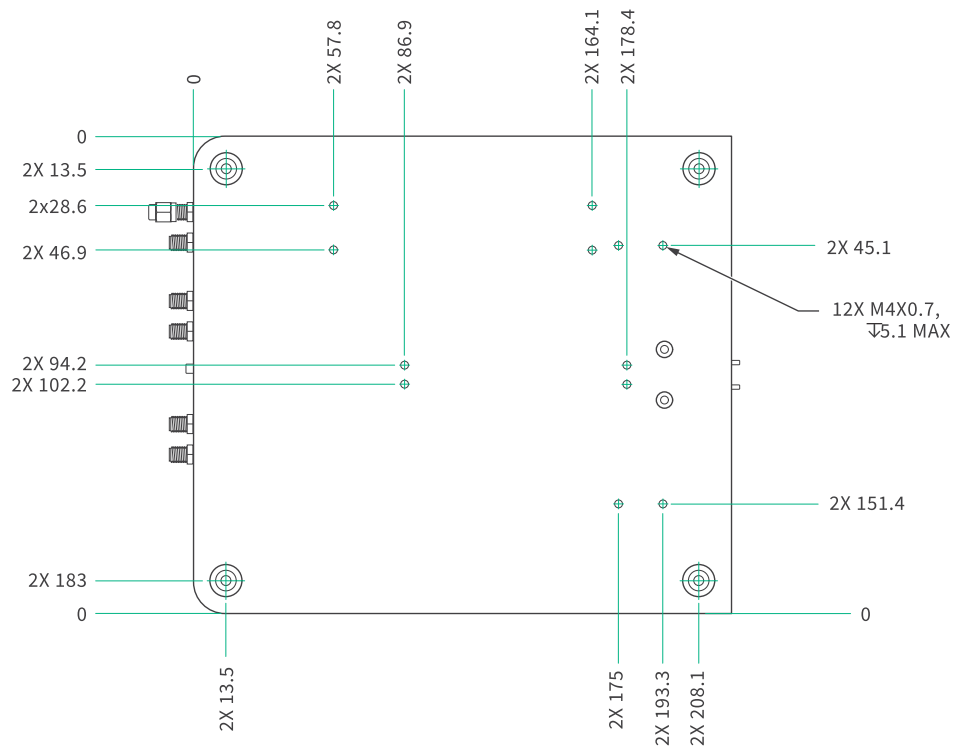


Figure 9. mmRH-5592 Mechanical Dimensions, Bottom View